

Function 2.5


Collection	Function + Flow	
Numéro Du Style	4386V	
Construction	Dalle De Vinyle De Luxe Commercial	
Classement	Class III, Type B	
Finition	ExoGuard+®	
	U.s.	Metric
Dimensions Nominales	18 in w x 18 in l	46 cm w x 46 cm l
Dimensions Réelles	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
Épaisseur De La Couche d'Usure	22 mil (0.022 in)	0.56 mm
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pièces Par Carton	20 pcs	
Surface Par Carton	45 sq ft	4.18 sq m
Poids Par Carton	40.15 lbs	18.21 kg



Méthodes d'Installation Conseillées

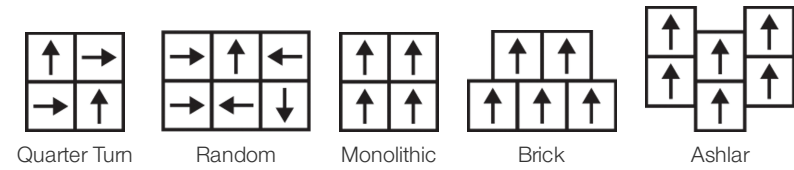

Coordination Des Produits

LVT: Flow 2.5, Flow 5.0 Lit

Performance + Tests Et Essai

Charge Statique (Astm F970)	<b>Passes (Modified), *1500 lbs</b>	Ce Test Vise À Comparer Les Propriétés Relatives De Différents Styles Et Modes De Construction. Les Résultats Sont Basés Sur Des Tests En Laboratoire Et Utilisés À Des Fins Comparatives ; La Charge Réelle Peut Varier.
Empreinte Résiduelle (Astm F1914)	<b>Passes</b>	
Résistance À La Chaleur (Astm F1514)	<b>Passes</b>	
Résistance À La Lumière (Astm F1515)	<b>Passes</b>	
Résistance Chimique (Astm F925)	<b>Passes</b>	
Panneau Rayonnant (Astm E648)	<b>Passes, Class I</b>	
Coefficient De Frottement (Astm D2407, Résistance Au Glissement)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garanties

- Limitée Commerciale De 15 Ans
- Commercial 15 Year Underbed Bond Warranty

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

Déclaration environnementale de produit (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2018</b>
FloorScore®	<b>Certifié</b>
Total Recycled Content	<b>0% (Pre-Consumer 0%   Post-Consumer 0%)</b>
pays d'origine	<b>Chine</b>

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>FloorScore Certificate</b>

Contribution À La Certification Leed









MR Credit: Building Product Disclosure and Optimisation  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
"Crédit EQ : matériaux faibles émissions  
Option 1 : calculs par catégorie de produit"

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018  
FloorScore Certified

Installation Guidelines  
Maintenance Guidelines

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.





Indice De Réflexion Lumineuse

			
 Silica 86100 LRV 57   L* 80.17 V2 - Slight Variation	 Transition 86501 LRV 42.4   L* 71.15 V2 - Slight Variation	 Pebble 86504 LRV 39.9   L* 69.43 V2 - Slight Variation	 Change 86520 LRV 23.5   L* 55.58 V2 - Slight Variation

 Quick Ship In Stock - UK

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--