

Function 2.5

Stijlnummer	4386V	
Producttype	Commerciële Luxe Vinyl Tegel	
Collectie	Function + Flow	
Uitzicht	Stijlnaam	Gegevens + Prestatie
Type of Floorcovering	EN 1307	Vinyl Tile
Classificatie	ISO 10874	class 33 heavy commercial use
Totale Massa	EN ISO 23997	4.04 kg/m²
Totale Dikte	EN ISO 24346	2.5 mm
Afmetingen	EN 994	45.72 cm x 45.72 cm 20 tiles (4.18 sq m)
		per box
Gewicht Per Doos		18.21 kg




Prestatie


Ontvlambaarheid	EN 13501-1	Bfl-S1
Warmteweerstand m² K/w	ISO 8302	0.013 m² K/W
Elektrostatische Weerstand	EN 1815	≤ 2.0 kV (stroll test)
Slipweerstand	BS 7976-2	PTV Dry 46 PTV Wet 32 (pendulum)
	DIN 51130	R10
Dimensionale Stabiliteit	EN ISO 23999	≤0.15%
Stoel Met Wieltjes	EN 425, ISO 4918	no damage
Contactgeluidreductie	BS EN ISO 10140	ΔLw 2dB/18dB with 2mm underlay
Geluidsabsorptie	ISO 354	0.013 m² K/W
Kleurvastheid Voor Licht	BS EN ISO 105-BO2	7
Emissies	ISO 16000	Yes

15 Jaar Commercieel Beperkt subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Aanbevolen Installatiemethode

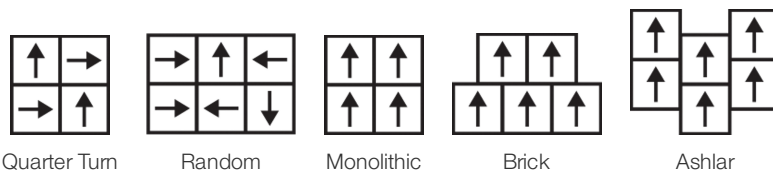


colour and visual variation index

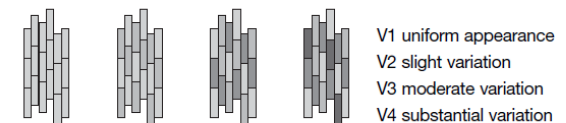


Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

Coördinerende Producten

LVT: Flow 2.5, Flow 5.0 LIT



ΔLw 2dB/18dB with 2mm underlay

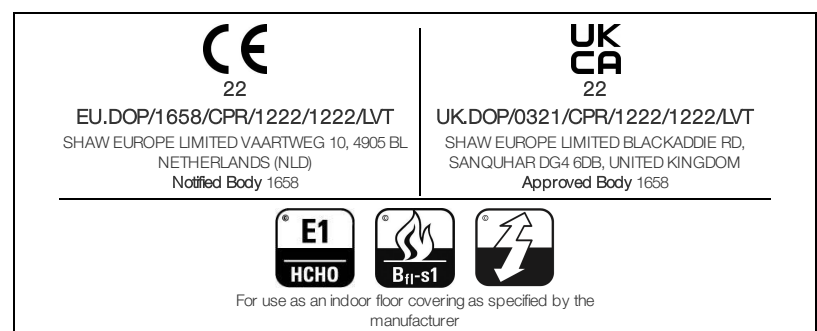

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
April 18, 2025

producttransparantie

Shaw Contract streeft ernaar klanten een bouwchemie bieden die veilig en betrouwbaar is. Samen zullen wij u helpen om uw doelstellingen op het gebied van materiaalgezondheid te bereiken. Luxe Vinyl

Kenmerken + Certificeringen

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018
FloorScore®	Gecertificeerd
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
land van herkomst	China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Reductie gevaarlijke stoffen Deel 1: Beperking Optimalisatie Gevaarlijke Materialen - 1 pt	Absence of Heavy Metals
X10 Reductie van vluchtige stoffen Deel 1 (A): Beheer Vluchtige Organische Stoffen (VOS) Optimalisatie - 1 pt	Absence of Halogenated Flame Retardants
Deel 2: Beheer van halfvluchtige organische stoffen (SVOC) Optimalisatie - 1 pt	Ortho-Phthalates
X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt	FloorScore Certificate

Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2018
"EQ-krediet: materialen met lage emissie Optie 1: Berekeningen per productcategorie"	FloorScore® Certified

[Installation Guidelines](#)





[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Lichtreflectiewaarde

			
Silica 86100	Transition 86501	Pebble 86504	Change 86520
LRV 57 L* 80.17	LRV 42.4 L* 71.15	LRV 39.9 L* 69.43	LRV 23.5 L* 55.58
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation

