


Flow 2.5

Collectie	Function + Flow	
Stijlnummer	4385V	
Uitzicht	Commerciële Luxe Vinyl Tegel	
klasse	Class III, Type B	
Afwerking	ExoGuard+®	
	U.s.	Metric
Nominale Afmetingen	18 in w x 18 in l	46 cm w x 46 cm l
Werkelijke Afmetingen	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
Dikte Slijtlaag	22 mil (0.022 in)	0.56 mm
Totale Dikte Van Het Product	0.098 in	2.5 mm
Installation Type	Dry Back	
Installatie	Direct Glue	
Aanbevolen Kleefstof	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Verpakking

Stuks Per Doos	20 pcs	
Oppervlakte Per Doos	45 sq ft	4.18 sq m
Gewicht Per Doos	40.15 lbs	18.21 kg

Aanbevolen Installatiemethode

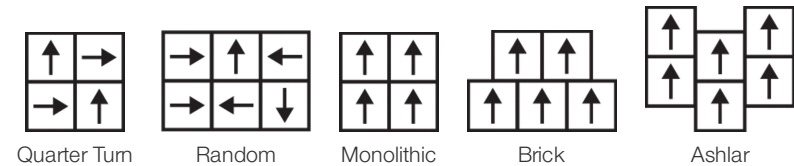

Coördinerende Producten

LVT: Function 2.5, Flow 5.0 Lit

Prestatie + Testen

Statische Belasting (Astm F970)	Passes (Modified), *1500 lbs	Deze Test Is Bedoeld Om De Relatieve Eigenschappen Van Verschillende Stijlen En Constructies Te Vergelijken. De Resultaten Zijn Gebaseerd Op Een Laboratoriumtest En Worden Gebruikt Voor Vergelijkende Doelinden - De Reële Belastingslimiet Kan Variëren.
Resterende Indeking (Astm F1914)	Passes	
Hittebestendigheid (Astm F1514)	Passes	
Weerstand Tegen Licht (Astm F1515)	Passes	
Weerstand Tegen Chemicaliën (Astm F925)	Passes	
Stralingspaneel (Astm E648)	Passes, Class I	
Wrijvingscoëfficiënt (Astm D2407, Slipweerstand)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

15 Jaar Commercieel Beperkt
Commercial 15 Year Underbed Bond Warranty

producttransparantie

Shaw Contract streeft ernaar klanten een bouwchemie bieden die veilig en betrouwbaar is. Samen zullen wij u helpen om uw doelstellingen op het gebied van materiaalgezondheid te bereiken. Luxe Vinyl

Kenmerken + Certificeringen

Environmental Product Declaration (EPD)	3de Partij Gecertificeerd in Overeenstemming Met ISO 14025, EN 15804, & ISO 21930:2017
FloorScore®	Gecertificeerd
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
land van herkomst	China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
"EQ-krediet: materialen met lage emissie Optie 1: Berekeningen per productcategorie"	FloorScore Certified

- Installation Guidelines
- Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.





Visit shawcontract.com/testing for more information.

Lichtreflectiewaarde

			
Smooth 85114 LRV 36.9 L* 67.22 V3 - Moderate Variation	Sandstone 85120 LRV 32.5 L* 63.77 V3 - Moderate Variation	Streamline 85520 LRV 25.6 L* 57.62 V3 - Moderate Variation	Molten 85585 LRV 13 L* 42.71 V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--

