


Flow 5.0

Coleção	Function + Flow	
Número Do Produto	4387V	
Construção	Vinílico De Luxo Em Régua (Lvt) Comercial	
classe	Class III, Type B	
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	18 in w x 18 in l	46 cm w x 46 cm l
Dimensões Reais	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
Espessura Da Camada De Uso	22 mil (0.022 in)	0.56 mm
Espessura Total Do Produto	0.197 in	5 mm
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	22.5 sq ft	2.09 sq m
Peso Por Caixa	44.74 lbs	20.29 kg

Método De Instalação Recomendado

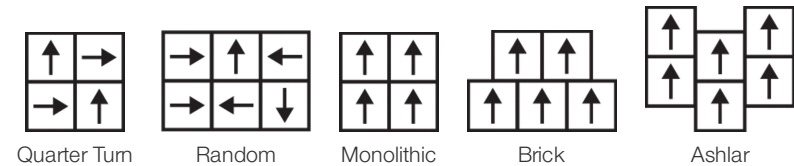

Produtos Coordenados

LVT: Flow 2.5, Function 2.5, Function 5.0, Flow 5.0 Llt

Desempenho + Teste

Carga Estática (Astm F970)	Passes (Modified), *1500 lbs	Este Teste Tem Como Objetivo Comparar Propriedades Relativas De Diferentes Estilos E Construções. Os Resultados São Baseados Em Um Teste De Laboratório E Usados Para Fins Comparativos - O Limite De Carga Na Vida Real Pode Variar.
Recuo Residual (Astm F1914)	Passes	
Resistência Ao Calor (Astm F1514)	Passes	
Resistência À Luz (Astm F1515)	Passes	
Resistência A Produtos Químicos (Astm F925)	Passes	
Painel Radiante (Astm E648)	Passes, Class I	
Coefficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificações

Health & Wellbeing	
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin China

Crédito De Contribuição







MR Credit: Divulgação e otimização de produtos de construção	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 FloorScore Certified
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
Maintenance Guidelines	

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Smooth 85114 LRV 37.7 L* 67.81 V3 - Moderate Variation	Sandstone 85120 LRV 32.1 L* 63.39 V3 - Moderate Variation	Dense 85504 LRV 32.4 L* 63.69 V3 - Moderate Variation	Shale 85518 LRV 19.9 L* 51.67 V3 - Moderate Variation	Streamline 85520 LRV 25.4 L* 57.45 V3 - Moderate Variation	Molten 85585 LRV 13.3 L* 43.23 V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------

