

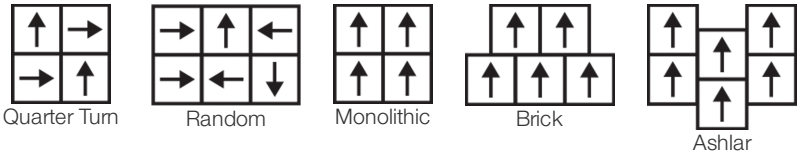
Function 5.0

| | | |
|---------------------------|--|-------------------------|
| Collection | Function + Flow | |
| Style Number | 4388V | |
| Construction | Commercial Luxury Vinyl Tile | |
| class | Class III, Type B | |
| Finish | ExoGuard+® | |
| | U.s. | Metric |
| Nominal Dimensions | 18 in w x 18 in l | 46 cm w x 46 cm l |
| Actual Dimensions | 18.00 in w x 18.00 in l | 45.72 cm w x 45.72 cm l |
| Wear Layer Thickness | 22 mil (0.022 in) | 0.56 mm |
| Overall Product Thickness | 0.197 in | 5 mm |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

Packaging

| | | |
|----------------|------------|-----------|
| Pieces Per Box | 10 pcs | |
| Area Per Box | 22.5 sq ft | 2.09 sq m |
| Weight Per Box | 44.74 lbs | 20.29 kg |

Recommended Installation Method



Coordinating Products

LVT: Flow 2.5, Function 2.5, Flow 5.0, Flow 5.0 Lit

performance + testing

| | | |
|---|---|--|
| static load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| residual indentation (ASTM F1914) | Passes | |
| resistance to heat (ASTM F1514) | Passes | |
| resistance to light (ASTM F1515) | Passes | |
| resistance to chemicals (ASTM F925) | Passes | |
| radiant panel (ASTM E648) | Passes, Class I | |
| coefficient of friction (ASTM D2407, slip resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited
Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

| | |
|---|--|
| Health & Wellbeing | |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 11.59 Kg Co ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin China |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | FloorScore Certificate |

Green Leed Contribution Credit

| | |
|--|---|
| MR Credit: Building Product Disclosure and Optimization | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | FloorScore® Certified |
| EQ Credit: Low Emitting Materials | |
| Option 1: Product Category Calculations | |

Installation Guidelines







Maintenance Guidelines


Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Silica 86100 LRV 58.7 L* 81.12 | Uniform 86120 LRV 36 L* 66.5 | Transition 86501 LRV 40.8 L* 70.01 | Pebble 86504 LRV 39.3 L* 68.94 | Composite 86506 LRV 24.5 L* 56.54 | Blend 86515 LRV 44 L* 72.2 |



Change 86520
LRV 24.8 | L* 56.93