

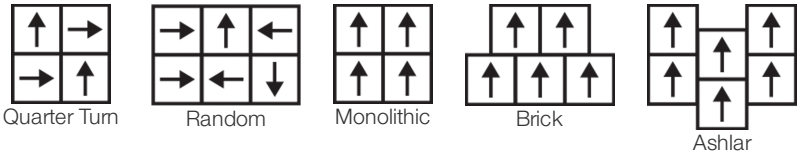
Function 5.0

コレクション	Function + Flow	
スタイルナンバー	4388V	
建設	商業用高級ビニールタイル	
クラス	Class III, Type B	
仕上げ	ExoGuard+®	
公称寸法	米国	メートル法
実際の寸法	18 in w x 18 in l	46 cm w x 46 cm l
摩耗層の厚さ	18.00 in w x 18.00 in l	45.72 cm w x 45.72 cm l
製品全体の厚さ	22 mil (0.022 in)	0.56 mm
Installation Type	0.197 in	5 mm
インストール	Dry Back	
推奨接着剤	Direct Glue	
	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	10 pcs	
ボックスあたりの面積	22.5 sq ft	2.09 sq m
ボックスあたりの重量	44.74 lbs	20.29 kg

推奨インストール方法



コーディネート商品

LVT: Flow 5.0 Lit

パフォーマンス + テスト

静荷重 (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
残留圧痕 (ASTM F1914)	Passes	
耐熱性 (ASTM F1514)	Passes	
耐光性 (ASTM F1515)	Passes	
耐薬品性 (ASTM F925)	Passes	
放射パネル (ASTM E648)	Passes, Class I	
摩擦係数(ASTM D2407、滑り抵抗)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[15年の商用限定保証](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+認定

Health & Wellbeing	
Indoor Air Quality	FloorScore® 認証取得
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得
Embodied Carbon (Cradle to Gate)	11.59 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin 中国

WELL V2 Contribution Credit







X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate


グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築 環境製品宣言-オプション1：環境製品宣言 (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQクレジット：低排出材料 オプション1：製品カテゴリの計算	FloorScore® Certified

Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
Maintenance Guidelines	
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.	
Visit shawcontract.com/testing for more information.	

Available Colorways

					
Silica 86100 LRV 58.7 L* 81.12	Uniform 86120 LRV 36 L* 66.5	Transition 86501 LRV 40.8 L* 70.01	Pebble 86504 LRV 39.3 L* 68.94	Composite 86506 LRV 24.5 L* 56.54	Blend 86515 LRV 44 L* 72.2



Change 86520
LRV 24.8 | L* 56.93