

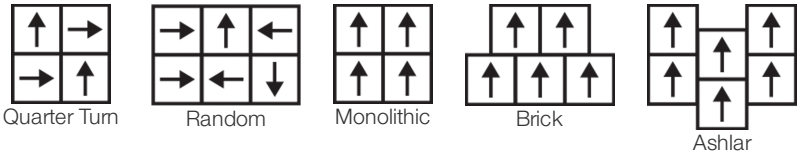
Function 5.0

| | | |
|-------------------|--|-------------------------|
| 系列 | Function + Flow | |
| 款型编号 | 4388V | |
| 结构 | 商用;Vt | |
| 类型 | Class III, Type B | |
| 表面处理 | ExoGuard+® | |
| | 美国 | 尺寸标准 |
| 公称尺寸 | 18 in w x 18 in l | 46 cm w x 46 cm l |
| 实际尺寸 | 18.00 in w x 18.00 in l | 45.72 cm w x 45.72 cm l |
| 耐磨层厚度 | 22 mil (0.022 in) | 0.56 mm |
| 产品整体厚度 | 0.197 in | 5 mm |
| Installation Type | Dry Back | |
| 安装方式 | Direct Glue | |
| 胶粘剂建议 | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon | |

包装

| | | |
|------|------------|-----------|
| 每盒件数 | 10 pcs | |
| 每箱面积 | 22.5 sq ft | 2.09 sq m |
| 每箱重量 | 44.74 lbs | 20.29 kg |

铺装建议



搭配产品

LVT: Flow 5.0 Lit

性能 + 测试

| | | |
|------------------------|---|--|
| 静态载荷 (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| 残余压痕 (ASTM F1914) | Passes | |
| 耐热性 (ASTM F1514) | Passes | |
| 耐光性 (ASTM F1515) | Passes | |
| 耐化学性 (ASTM F925) | Passes | |
| 辐射板 (ASTM E648) | Passes, Class I | |
| 摩擦系数 (ASTM D2407, 防滑性) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

质保

[Commercial 15 Year Underbed Bond Warranty](#)
[15年商用有限质保](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+认证

| | |
|---|---|
| Health & Wellbeing | |
| Indoor Air Quality | FloorScore® 认证 |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 通过ISO 14025、EN 15804和ISO 21930 : 2017等第三方认证 |
| Embodied Carbon (Cradle to Gate) | 11.59 Kg Co ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | Country of Origin 中国 |

WELL V2 Contribution Credit







| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | FloorScore Certificate |


绿色leed贡献信用

| | |
|---------------------------|---|
| MR Credit : 建立产品披露和优化 | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| 环境产品声明-选项1 : 环境产品声明 (EPD) | FloorScore® Certified |
| EQ信用 : 低排放材料 | |
| 选项1 : 产品类别计算 | |

| | |
|-------------------------|---|
| Installation Guidelines | |
| Maintenance Guidelines | Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. |
| | This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. |
| | Visit shawcontract.com/testing for more information. |

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Silica 86100 LRV 58.7 L* 81.12 | Uniform 86120 LRV 36 L* 66.5 | Transition 86501 LRV 40.8 L* 70.01 | Pebble 86504 LRV 39.3 L* 68.94 | Composite 86506 LRV 24.5 L* 56.54 | Blend 86515 LRV 44 L* 72.2 |



Change 86520
LRV 24.8 | L* 56.93