


Branching Out 5mm Acoustic

Collection	Branching Out	
Style Number	4256V	
Construction	Light Commercial Luxury Vinyl Tile With Acoustic Backing	
Attached Underlayment	Pad	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	20 sq ft	1.86 sq m
Weight per Carton	27.12 lbs	12.3 kg

Recommended Installation Method

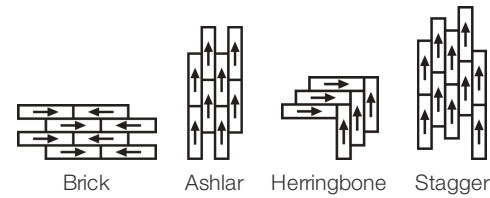

Coordinating Products

LVT: Branching Out 5.0 Mm  
COREtec: Branching Out Coretec 12 Mil, Branching Out Coretec 20 Mil

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	7.31 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	CE Marking (EN 14041)   3rd Party Certified
	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Tem Emissions Control Part 2: Flooring Optimization	FloorScore Certificate
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	Health Product Declaration (HPD)   1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore Certified

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Alpine Oak 56100  
V3 - Moderate Variation



Zion Oak 56103  
V2 - Slight Variation



Rise Oak 56120  
V3 - Moderate Variation



Riverside Oak 56140  
V2 - Slight Variation



Prairie Oak 56240  
V3 - Moderate Variation



Plains Oak 56250  
V3 - Moderate Variation



Ridgeline Oak 56504  
V3 - Moderate Variation



Range Oak 56506  
V2 - Slight Variation



Smoky Oak 56516  
V3 - Moderate Variation



Forest Walnut 56703  
V2 - Slight Variation



Pinecone Oak 56720  
V3 - Moderate Variation




Ravine Oak 56730  
V2 - Slight Variation





Traverse Oak 56760  
V3 - Moderate Variation


Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  
  
Uniform Appearance

V2  
  
Slight Variation

V3  
  
Moderate Variation

V4  
  
Substantial Variation

