


Branching Out 5mm Acoustic

Collection	Branching Out	
Style Number	4256V	
Construction	Unit / Guestroom Luxury Vinyl Tile With Acoustic Backing	
Attached Underlayment	Pad	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Approved Spaces	Units/Guestrooms Only	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces per Carton	10 pcs	
Area per Carton	20 sq ft	1.86 sq m
Weight per Carton	27.12 lbs	12.3 kg

Recommended Installation Method

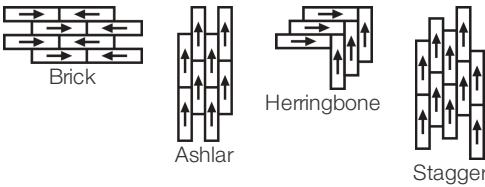

Coordinating Products

LVT: Branching Out 5.0 Mm
COREtec: Branching Out Coretec 12 Mil, Branching Out Coretec 20 Mil

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Light Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certified

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
11.59 Kg CO₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | Imported

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials Optimization
- X10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization
- X10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization
- X11 Long Term Emissions Control
Part 2: Flooring Optimization
- X14 Material Transparency
Part 1: Promote Ingredient Disclosure Optimization

- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore Certificate
- Health Product Declaration (HPD) | 1000 Ppm Disclosure

Leed v4 Contribution Credits

- MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting
- MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)
- EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

- Health Product Declaration (HPD) | 1000 Ppm Disclosure
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore Certified

- [Installation Guidelines](#)
- [Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Alpine Oak 56100
V3 - Moderate Variation



Zion Oak 56103
V2 - Slight Variation



Rise Oak 56120
V3 - Moderate Variation



Riverside Oak 56140
V2 - Slight Variation



Prairie Oak 56240
V3 - Moderate Variation



Plains Oak 56250
V3 - Moderate Variation



Ridgeline Oak 56504
V3 - Moderate Variation



Range Oak 56506
V2 - Slight Variation



Smoky Oak 56516
V3 - Moderate Variation



Forest Walnut 56703
V2 - Slight Variation



Pinecone Oak 56720
V3 - Moderate Variation



Ravine Oak 56730
V2 - Slight Variation



Traverse Oak 56760
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

