

Pathway


Colección	Pathway & Promenade	
Número De Estilo	4281V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	36 in w x 36 in l	91 cm w x 91 cm l
Dimensiones Reales	36.00 in w x 36.00 in l	91.44 cm w x 91.44 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.197 in	5 mm
Perfil De Borde	Micro-Biselado	
Installation Type	Loose Lay	
Instalación	Direct Glue, Perimeter Glue Or Loose Lay	
Adhesivo Recomendado	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

Embalaje

Piezas Por Caja	4 pcs	
Área Por Caja	35.99 sq ft	3.34 sq m
Peso Por Caja	71.34 lbs	32.36 kg



Método De Instalación Recomendado

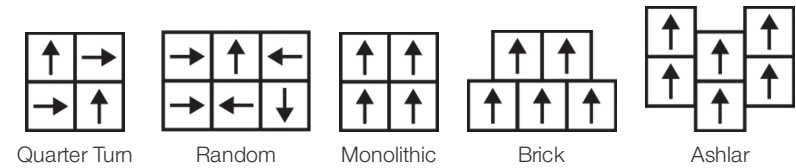

Productos Que Combinan

LVT: Promenade

desempeño + pruebas

resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
resistencia a productos químicos (ASTM F925)	Passes
panel radiante (ASTM E648)	Passes, Class I
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality
- Health Product Declaration (HPD) | 1000 ppm Disclosure
- FloorScore® | Certificado

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Life-Cycle Carbon Emissions****
- Total Recycled Content
- Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
- 6.05 Kg Co₂/M²
- Low Embodied Carbon
- 0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | China

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
- X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts
- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore Certificate
- Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribución Para Créditos Leed

- Crédito MR: Divulgación y optimización de productos de construcción
- Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales
- Crédito MR: Divulgación y optimización de productos de construcción
- Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)
- Crédito EQ: Materiales de baja emisión
- Opción 1: Cálculos de categoría de producto
- Health Product Declaration (HPD) | 100 Ppm Disclosure
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore® Certified

Installation Guidelines

Maintenance Guidelines


Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Radiance 01041
V3 - Moderate Variation



Attraction 05081
V3 - Moderate Variation



Oneness 05082
V3 - Moderate Variation




Union 05085
V3 - Moderate Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation

