

Pathway


コレクション	Pathway & Promenade	
スタイルナンバー	4281V	
建設	Heavy Commercial Luxury Vinyl Tile	
クラス	Class III, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	36 in w x 36 in l	91 cm w x 91 cm l
実際の寸法	36.00 in w x 36.00 in l	91.44 cm w x 91.44 cm l
摩耗層の厚さ	20 mil (0.02 in)	0.51 mm
製品全体の厚さ	0.197 in	5 mm
エッジプロファイル	マイクロベベル	
Installation Type	Loose Lay	
インストール	Direct Glue, Perimeter Glue Or Loose Lay	
推奨接着剤	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

包装

ボックスあたりの個数	4 pcs	
ボックスあたりの面積	35.99 sq ft	3.34 sq m
ボックスあたりの重量	71.34 lbs	32.36 kg



推奨インストール方法

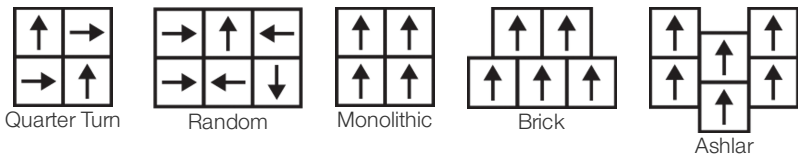

コーディネート商品

LVT: Promenade

パフォーマンス + テスト

耐熱性 (ASTM F1514)	Passes
耐光性 (ASTM F1515)	Passes
耐薬品性 (ASTM F925)	Passes
放射パネル (ASTM E648)	Passes, Class I
摩擦係数(ASTM D2407、滑り抵抗)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

15年の商用限定保証

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+認定

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   認証取得
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得
Embodied Carbon (Cradle to Gate)	6.05 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions****	Low Embodied Carbon
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   中国

WELL V2 Contribution Credit


X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築 材料成分-オプション1：材料成分レポート	<b>Health Product Declaration (HPD)   100 Ppm Disclosure</b>
MRクレジット：製品の開示と最適化の構築 環境製品宣言-オプション1：環境製品宣言（EPD）	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
EQクレジット：低排出材料 オプション1：製品カテゴリの計算	<b>FloorScore® Certified</b>

Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

Available Colorways

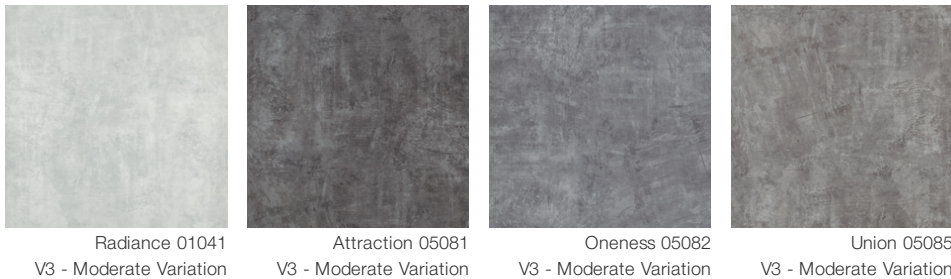

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

