

## Pathway


수집	<b>Pathway &amp; Promenade</b>	
스타일 번호	<b>4281V</b>	
구성	<b>Heavy Commercial Luxury Vinyl Tile</b>	
수업	<b>Class III, Type B</b>	
끝	<b>ExoGuard®</b>	
	미국	미터법
공칭 치수	<b>36 in w x 36 in l</b>	<b>91 cm w x 91 cm l</b>
실제 치수	<b>36.00 in w x 36.00 in l</b>	<b>91.44 cm w x 91.44 cm l</b>
마모 층 두께	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
전체 제품 두께	<b>0.197 in</b>	<b>5 mm</b>
가장자리 프로파일	<b>마이크로 베벨</b>	
Installation Type	<b>Loose Lay</b>	
설치	<b>Direct Glue, Floating Or Perimeter Gl</b>	
권장 접착제	<b>, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or</b>	

### 포장

상자 당 조각	<b>4 pcs</b>	
상자 당 면적	<b>35.99 sq ft</b>	<b>3.34 sq m</b>
상자 당 무게	<b>71.34 lbs</b>	<b>32.36 kg</b>



### 권장 설치 방법

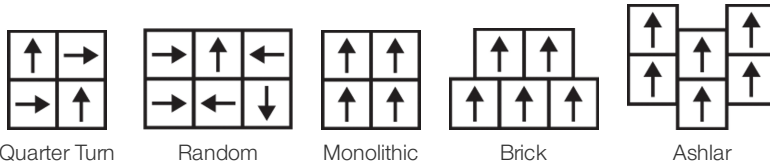

### 코디네이팅 제품

LVT: Promenade

### 공연 + 테스트

내열성 (ASTM F1514)	<b>Passes</b>
내광성 (ASTM F1515)	<b>Passes</b>
화학 물질에 대한 내성 (ASTM F925)	<b>Passes</b>
복사 패널 (ASTM E648)	<b>Passes, Class I</b>
마찰 계수 (ASTM D2407, 미끄러짐 저항)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 보증

[15년 상용 제한](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 속성 + 인증

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | 인증

## Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득  
6.05 Kg CO<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## 녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
재료 성분-옵션 1 : 재료 성분보고  
MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**


[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Available Colorways




Radiance 01041  
V3 - Moderate Variation



Attraction 05081  
V3 - Moderate Variation



Oneness 05082  
V3 - Moderate Variation




Union 05085  
V3 - Moderate Variation

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation

