

Promenade


Collection	Pathway & Promenade	
Style Number	4280V	
Construction	Heavy Commercial Luxury Vinyl Tile	
class	Class III, Type B	
Finish	ExoGuard®	
	U.s.	Metric
Nominal Dimensions	9 in w x 63 in l	23 cm w x 160 cm l
Actual Dimensions	8.97 in w x 62.99 in l	22.78 cm w x 159.99 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Product Thickness	0.197 in	5 mm
Edge Profile	Micro-Bevel	
Installation Type	Loose Lay	
Installation	Direct Glue, Floating Or Perimeter Gl	
Recommended Adhesive	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

Packaging

Pieces Per Box	6 pcs	
Area Per Box	23.62 sq ft	2.19 sq m
Weight Per Box	46.83 lbs	21.24 kg



Recommended Installation Method

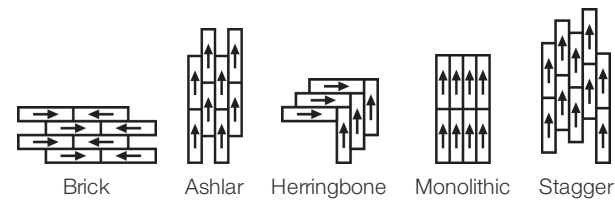

Coordinating Products

LVT: Pathway

performance + testing

resistance to heat (ASTM F1514)

Passes

resistance to light (ASTM F1515)

Passes

resistance to chemicals (ASTM F925)

Passes

radiant panel (ASTM E648)

Passes, Class I

coefficient of friction (ASTM D2407, slip resistance)

≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[15 Year Commercial Limited](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos  
Absence of Heavy Metals  
Absence of Halogenated Flame Retardants  
  
Ortho-Phthalates  
FloorScore Certificate  
Health Product Declaration (HPD) | 1000 Ppm Disclosure

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore® Certified

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Canyon 01070  
V3 - Moderate Variation



Weathered Bark 01071  
V3 - Moderate Variation



Burnished Timbe 01072  
V3 - Moderate Variation



Pebble 01073  
V3 - Moderate Variation



River Rock 01076  
V3 - Moderate Variation



Honeycomb 01077  
V3 - Moderate Variation



Pyrite 01078  
V3 - Moderate Variation



Igneous 05104  
V3 - Moderate Variation



Graphite Steel 05107  
V3 - Moderate Variation



Bronze 07205  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation