


## Promenade


コレクション	<b>Pathway &amp; Promenade</b>	
スタイルナンバー	<b>4280V</b>	
建設	<b>Heavy Commercial Luxury Vinyl Tile</b>	
クラス	<b>Class III, Type B</b>	
仕上げ	<b>ExoGuard®</b>	
	米国	メートル法
公称寸法	<b>9 in w x 63 in l</b>	<b>23 cm w x 160 cm l</b>
実際の寸法	<b>8.97 in w x 62.99 in l</b>	<b>22.78 cm w x 159.99 cm l</b>
摩耗層の厚さ	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
製品全体の厚さ	<b>0.197 in</b>	<b>5 mm</b>
エッジプロファイル	<b>マイクロロベベル</b>	
Installation Type	<b>Loose Lay</b>	
インストール	<b>Direct Glue, Floating Or Perimeter Gl</b>	
推奨接着剤	<b>, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or</b>	

### 包装

ボックスあたりの個数	<b>6 pcs</b>	
ボックスあたりの面積	<b>23.62 sq ft</b>	<b>2.19 sq m</b>
ボックスあたりの重量	<b>46.83 lbs</b>	<b>21.24 kg</b>

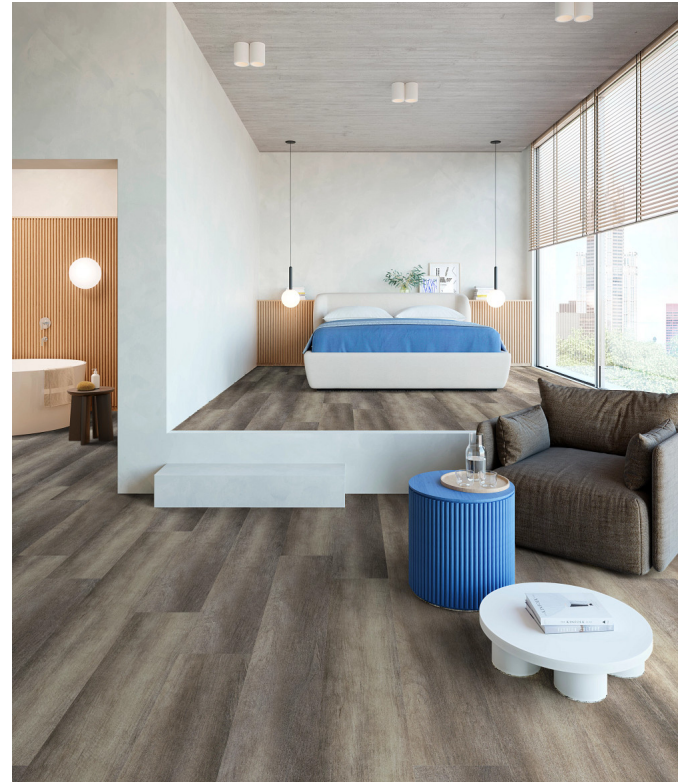

### 推奨インストール方法

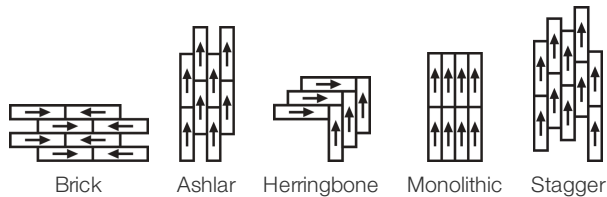

### コーディネート商品

LVT: Pathway

### パフォーマンス + テスト

耐熱性 (ASTM F1514)	<b>Passes</b>
耐光性 (ASTM F1515)	<b>Passes</b>
耐薬品性 (ASTM F925)	<b>Passes</b>
放射パネル (ASTM E648)	<b>Passes, Class I</b>
摩擦係数(ASTM D2407、滑り抵抗)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## 保証

[15年の商用限定保証](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 属性+認定

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | 認証取得

## Climate Impact

Environmental Product Declaration (EPD)  
Total Recycled Content

ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

Country of Origin | 中国

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築  
材料成分-オプション1：材料成分レポート  
MRクレジット：製品の開示と最適化の構築  
環境製品宣言-オプション1：環境製品宣言 (EPD)  
EQクレジット：低排出材料  
オプション1：製品カテゴリの計算

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways



Canyon 01070  
V3 - Moderate Variation



Weathered Bark 01071  
V3 - Moderate Variation



Burnished Timbe 01072  
V3 - Moderate Variation



Pebble 01073  
V3 - Moderate Variation



River Rock 01076  
V3 - Moderate Variation



Honeycomb 01077  
V3 - Moderate Variation



Pyrite 01078  
V3 - Moderate Variation



Igneous 05104  
V3 - Moderate Variation



Graphite Steel 05107  
V3 - Moderate Variation



Bronze 07205  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation