


Promenade


수집	Pathway & Promenade	
스타일 번호	4280V	
구성	Heavy Commercial Luxury Vinyl Tile	
수업	Class III, Type B	
끝	ExoGuard®	
	미국	미터법
공칭 치수	9 in w x 63 in l	23 cm w x 160 cm l
실제 치수	8.97 in w x 62.99 in l	22.78 cm w x 159.99 cm l
마모 층 두께	20 mil (0.02 in)	0.51 mm
전체 제품 두께	0.197 in	5 mm
가장자리 프로파일	마이크로 베벨	
Installation Type	Loose Lay	
설치	Direct Glue, Perimeter Glue Or Loose Lay	
권장 접착제	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

포장

상자 당 조각	6 pcs	
상자 당 면적	23.62 sq ft	2.19 sq m
상자 당 무게	46.83 lbs	21.24 kg

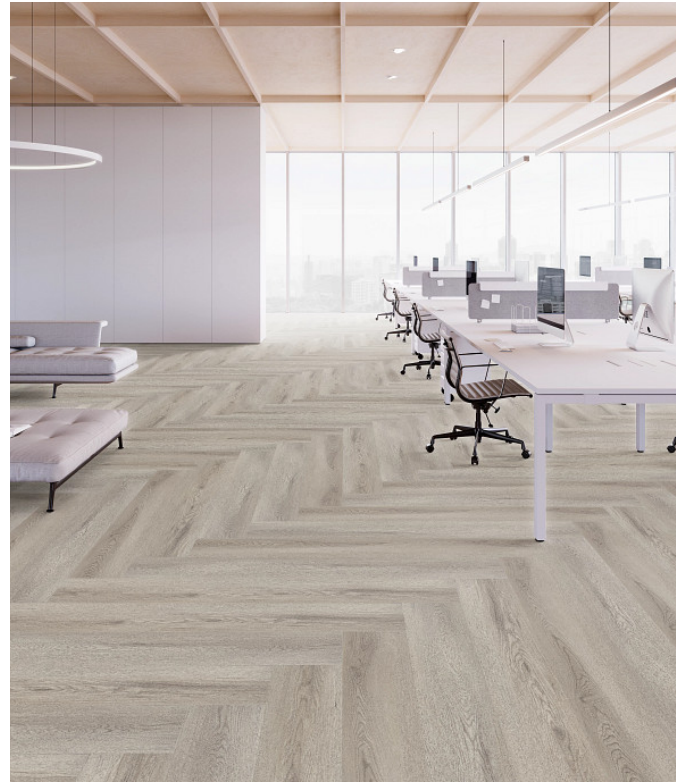

권장 설치 방법

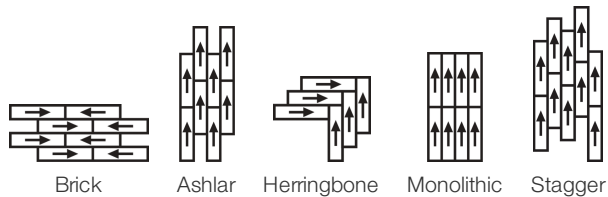

코디네이팅 제품

LVT: Pathway

공연 + 테스트

내열성 (ASTM F1514)
 내광성 (ASTM F1515)
 화학 물질에 대한 내성 (ASTM F925)
 복사 패널 (ASTM E648)
 마찰 계수 (ASTM D2407, 미끄러짐 저항)

Passes
Passes
Passes
Passes, Class I

≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

15년 상용 제한

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

속성 + 인증

Health & Wellbeing

- Material Ingredient Transparency
- Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | 인증

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득
11.9 Kg Co₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
- X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate
Health Product Declaration (HPD) | 1000 Ppm Disclosure

녹색의 공헌 기여 크레딧

- MR 크레딧 : 제품 공개 및 최적화 구축
- 재료 성분-옵션 1 : 재료 성분보고
- MR 크레딧 : 제품 공개 및 최적화 구축
- 환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)
- EQ 크레딧 : 저 발광 재료
- 옵션 1 : 제품 범주 계산

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways



Weathered Bark 01071
V3 - Moderate Variation



Burnished Timbe 01072
V3 - Moderate Variation



Pebble 01073
V3 - Moderate Variation




River Rock 01076
V3 - Moderate Variation



Pyrite 01078
V3 - Moderate Variation



Igneous 05104
V3 - Moderate Variation



Graphite Steel 05107
V3 - Moderate Variation



Bronze 07205
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

