

Promenade


系列	Pathway & Promenade	
款型编号	4280V	
结构	Heavy Commercial Luxury Vinyl Tile	
类型	Class III, Type B	
表面处理	ExoGuard®	
	美国	尺寸标准
公称尺寸	9 in w x 63 in l	23 cm w x 160 cm l
实际尺寸	8.97 in w x 62.99 in l	22.78 cm w x 159.99 cm l
耐磨层厚度	20 mil (0.02 in)	0.51 mm
产品整体厚度	0.197 in	5 mm
边缘轮廓	微斜角	
Installation Type	Loose Lay	
安装方式	Direct Glue, Perimeter Glue Or Loose Lay	
胶粘剂建议	, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or	

包装

每盒件数	6 pcs	
每箱面积	23.62 sq ft	2.19 sq m
每箱重量	46.83 lbs	21.24 kg



铺装建议

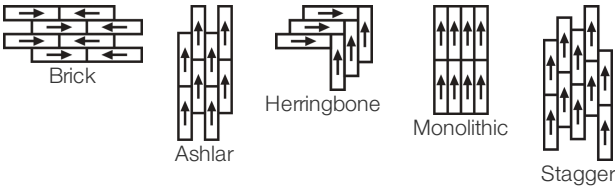

搭配产品

LVT: Pathway

性能 + 测试

耐热性 (ASTM F1514)	Passes
耐光性 (ASTM F1515)	Passes
耐化学性 (ASTM F925)	Passes
辐射板 (ASTM E648)	Passes, Class I
摩擦系数 (ASTM D2407, 防滑性)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

质保

15年商用有限质保

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+认证

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   认证
Climate Impact	
Environmental Product Declaration (EPD)	通过ISO 14025、EN 15804和ISO 21930 : 2017等第三方认证
Embodied Carbon (Cradle to Gate)	11.9 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   中国

WELL V2 Contribution Credit


X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore Certificate
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	Health Product Declaration (HPD)   1000 Ppm Disclosure

绿色leed贡献信用


MR Credit : 建立产品披露与优化 材料成分-选项1 : 材料成分报告	Health Product Declaration (HPD)   100 Ppm Disclosure
MR Credit : 建立产品披露和优化 环境产品声明-选项1 : 环境产品声明 (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ信用 : 低排放材料 选项1 : 产品类别计算	FloorScore® Certified

Installation Guidelines	
Maintenance Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.


Available Colorways




Weathered Bark 01071  
V3 - Moderate Variation




Burnished Timbe 01072  
V3 - Moderate Variation




Pebble 01073  
V3 - Moderate Variation




River Rock 01076  
V3 - Moderate Variation



Igneous 05104  
V3 - Moderate Variation



Graphite Steel 05107  
V3 - Moderate Variation



Bronze 07205  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

