


Serene 5.0

수집	Serene	
스타일 번호	4530V	
구성	섬유 유리를 가진 헤비급 상업적인 고급 비닐 도와	
수업	Class III, Type B	
끝	ExoGuard+®	
	미국	미터법
공칭 치수	7 in w x 48 in l	18 cm w x 122 cm l
실제 치수	7.25 in w x 48.00 in l	18.42 cm w x 121.92 cm l
마모 층 두께	22 mil (0.022 in)	0.56 mm
전체 제품 두께	0.197 in	5 mm
가장자리 프로파일	마이크로 베벨	
Installation Type	Loose Lay	
설치	Direct Glue Or Perimeter Glue	
권장 접착제	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail or 4151 Multi Use Premium 4 Gallon	

포장

상자 당 조각	8 pcs	
상자 당 면적	19.33 sq ft	1.8 sq m
상자 당 무게	37.88 lbs	17.18 kg

권장 설치 방법

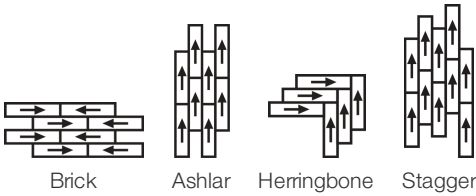

공연 + 테스트

정적 하중 (Astm F970)	Passes (Modified), *1500 lbs	이 테스트는 다양한 스타일과 구성의 상대적인 속성을 비교하기위한 것입니다. 결과는 실험실 테스트를 기반으로하며 비교 목적으로 사용됩니다. 실제 하중 한계는 다를 수 있습니다.	
내열성 (Astm F1514)	Passes		
내광성 (Astm F1515)	Passes		
화학 물질에 대한 내성 (Astm F925)	Passes		
연기 밀도 (Astm E662, 불타는 모드)	Passes		
복사 패널 (Astm E648)	Passes, Class I		
마찰 계수(astm D2407, 미끄러짐 저항)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.			

보증

15년 상용 제한  
[Commercial 15 Year Underbed Bond Warranty.](#)

## Diversity &amp; Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 속성 + 인증

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
FloorScore® | 인증

## Climate Impact

Environmental Product Declaration (EPD)  
Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## 녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
재료 성분-옵션 1 : 재료 성분보고  
MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

## Installation Guidelines


## Maintenance Guidelines

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

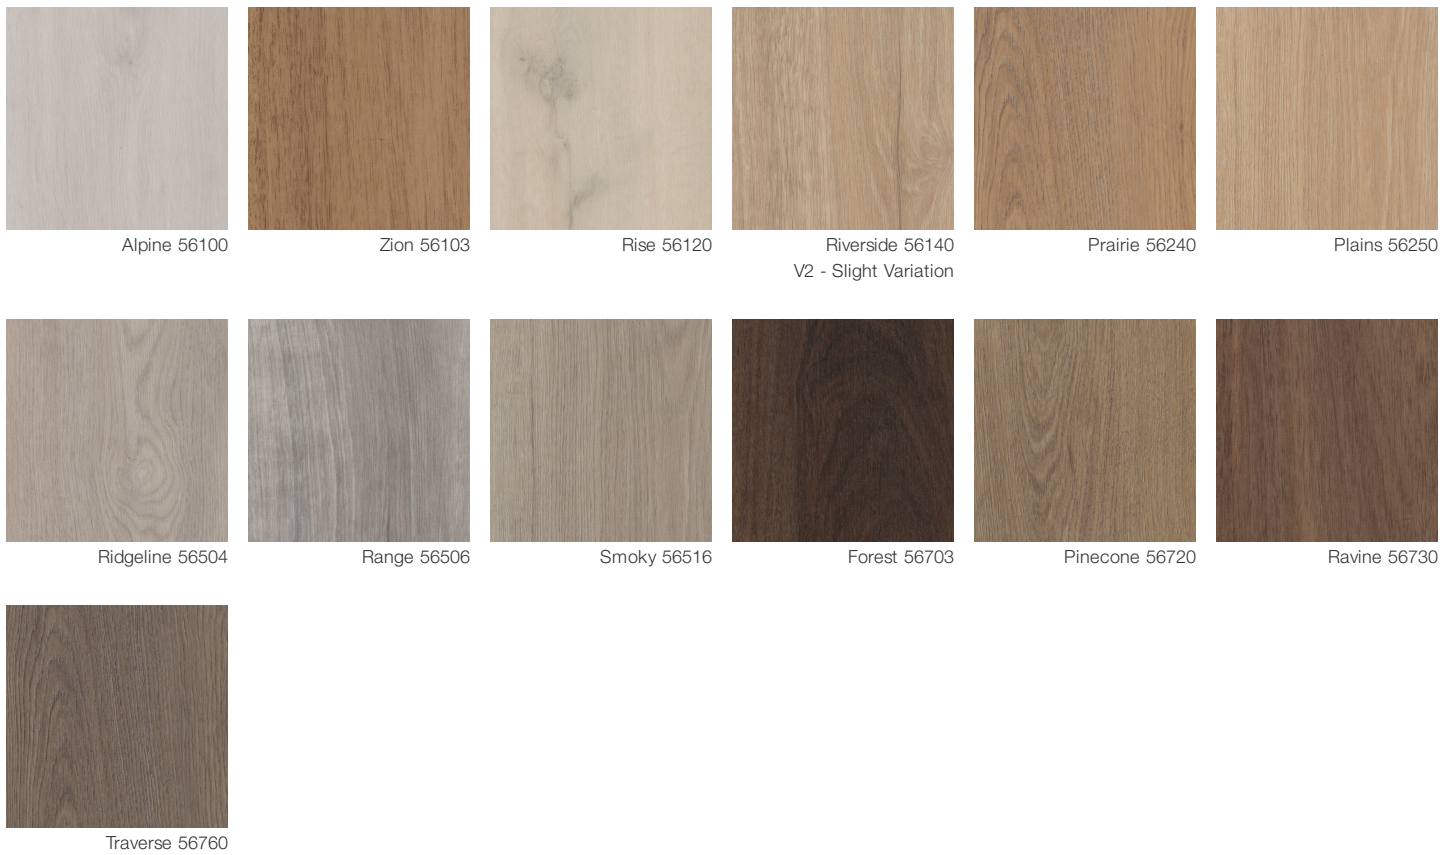

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302