

## Observe


Collection	<b>Art + Science</b>	
Style Number	<b>4566V</b>	
Construction	<b>Heavy Commercial Pvc-Free Ecoworx Resilient</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>8 in w x 51 in l</b>	<b>21 cm w x 129 cm l</b>
Actual Dimensions	<b>8.27 in w x 50.79 in l</b>	<b>21.01 cm w x 129.01 cm l</b>
Overall Thickness	<b>0.098 in</b>	<b>2.5 mm</b>
Edge Profile	<b>Micro-Bevel</b>	
Installation Type	<b>Dry Back</b>	
Recommended Adhesive	<b>4200 Resilient (1 gal) or 4200 Resilient (4 gal)</b>	

### Packaging

Pieces per Carton	<b>16 pcs</b>	
Area per Carton	<b>46.65 sq ft</b>	<b>4.33 sq m</b>
Weight per Carton	<b>36.43 lbs</b>	<b>16.52 kg</b>



### Recommended Installation Method

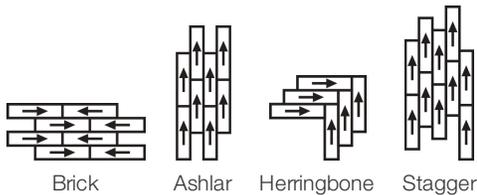

### Coordinating Products

PVC-Free: Pivot

## Performance + Testing

Static Load (ASTM F970)	<b>Passes (Modified), *2500 lbs</b>	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	<b>Passes</b>	
Resistance to Heat (ASTM F1514)	<b>Passes</b>	
Resistance to Light (ASTM F1515)	<b>Passes</b>	
Resistance to Chemicals (ASTM F925)	<b>Passes</b>	
Smoke Density (ASTM E662, Flaming Mode)	<b>Passes</b>	
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>	
Coefficient of Friction (ASTM D2047, Slip Resistance)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

## Material Health & Environmental Certifications

### Health & Wellbeing

Material Ingredient Transparency Greenhealth Approved | Yes  
Health Product Declaration (HPD) | 1000 ppm Disclosure  
Declare | LBC Compliant

### Climate Impact

Embodied Carbon (Cradle to Gate) 5.2 Kg Co<sub>2</sub>/M<sup>2</sup>  
 Life-Cycle Carbon Emissions Carbon Neutral  
 Total Recycled Content 25% (Pre-Consumer 0% | Post-Consumer 25%)

### Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.  
 Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>Absence of Halogenated Flame Retardants</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>Green Guard Gold Certified</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)


[Maintenance](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

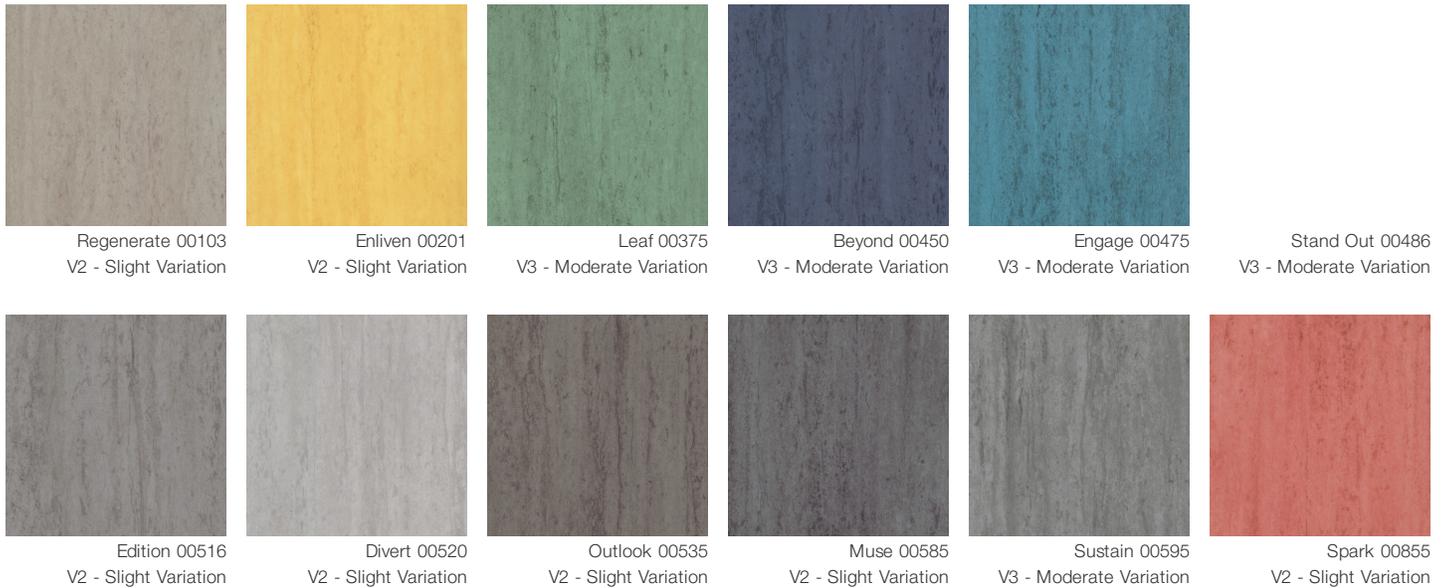

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Addresses priority chemicals of concern  
For more information visit GREENHEALTHAPPROVED.ORG

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302