


# ShawContract®

## Flow 5.0 Lt

Style Number	<b>4419V</b>	
Product Type	<b>Commercial Luxury Vinyl Tile</b>	
Collection	<b>Function + Flow</b>	
Construction	Standard	Data + Performance
Type of Floorcovering	<b>EN 1307</b>	<b>Vinyl Tile</b>
Classification	<b>ISO 10874</b>	<b>class 33 heavy commercial use</b>
Total Mass	<b>EN ISO 23997</b>	<b>8.92 kg/m<sup>2</sup></b>
Total Thickness	<b>EN ISO 24346</b>	<b>5.0 mm</b>
Finish		<b>ExoGuard+®</b>
Dimensions	<b>EN 994</b>	<b>91.44 cm x 91.44 cm   4 tiles (3.34 sq m) per box</b>
Weight per Box		<b>32.36 kg</b>

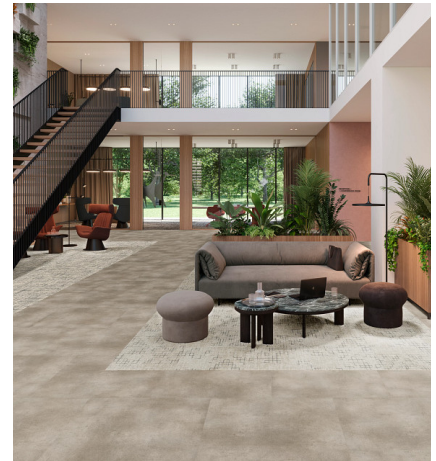


## Performance


Flammability	<b>EN 13501-1</b>	<b>Bfl-S1</b>
Thermal Resistance m <sup>2</sup> K/W	<b>ISO 8302</b>	<b>0.018 m<sup>2</sup> K/W</b>
Electrostatic Propensity	<b>EN 1815</b>	<b>≤ 2.0 kV (stroll test)</b>
Slip Resistance	<b>BS 7976-2</b> <b>DIN 51130</b>	<b>PTV Dry 68   PTV Wet 24 (pendulum)</b> <b>R10</b>
Dimensional Stability	<b>EN ISO 23999</b>	<b>≤0.15%</b>
Castor Chair	<b>EN 425, ISO 4918</b>	<b>no damage</b>
Impact Sound Reduction	<b>BS EN ISO 10140</b>	<b>ΔLw 4dB/21dB with 2mm underlay</b>
Sound Absorption	<b>ISO 354</b>	<b>0.018 m<sup>2</sup> K/W</b>
Colour Fastness to Light	<b>BS EN ISO 105-BO2</b>	<b>7/8</b>
Emissions	<b>ISO 16000</b>	<b>Yes</b>

**15 Year Commercial Limited Warranty** subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

## Recommended Installation Method

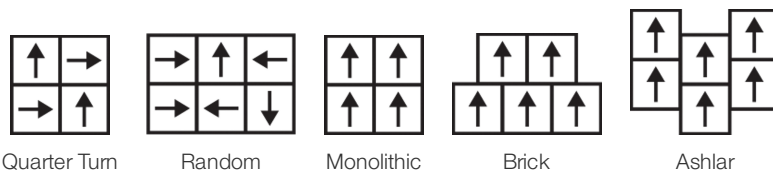


### colour and visual variation index

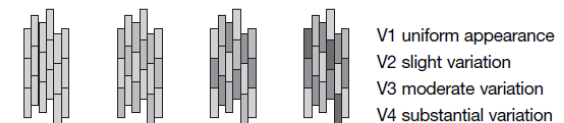






Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

## Coordinating Products

LVT: Flow 2.5, Function 2.5



ΔLw 4dB/21dB with 2mm underlay

 <b>22</b> EU.DOP/1658/CPR/1222/1222/LVT SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL NETHERLANDS (NLD) Notified Body 1658	 <b>22</b> UK.DOP/0321/CPR/1222/1222/LVT SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM Approved Body 1658
  	
For use as an indoor floor covering as specified by the manufacturer	

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
April 5, 2025

1 of 3

For reference purposes only if printed or downloaded.

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

Environmental Product Declaration (EPD)	<a href="#">3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</a>
FloorScore®	<a href="#">Certified</a>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Country of Origin	China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

[Installation Guidelines](#)  
[Maintenance Guidelines](#)


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


Light Reflectance Value



Smooth 85114  
LRV 37.7 | L\* 67.77  
V3 - Moderate Variation



Sandstone 85120  
LRV 34.1 | L\* 65.08  
V3 - Moderate Variation



Streamline 85520  
LRV 28.6 | L\* 60.4  
V3 - Moderate Variation




Molten 85585  
LRV 13.7 | L\* 43.86  
V3 - Moderate Variation


Quick Ship In Stock - UK

**Color and Visual Variation Index**


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1


Uniform Appearance

V2

Slight Variation

V3

Moderate Variation

V4

Substantial Variation

