

Flow 5.0 Lt

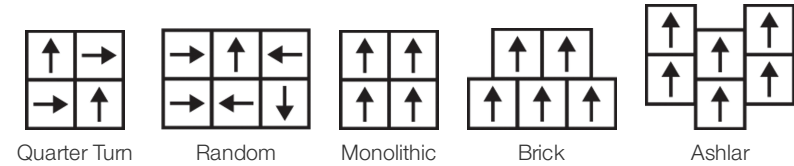
Collection	Function + Flow	
Numéro Du Style	4419V	
Construction	Dalle De Vinyle De Luxe Commercial	
Classement	Class III, Type B	
Finition	ExoGuard+®	
	U.s.	Metric
Dimensions Nominales	36 in w x 36 in l	91 cm w x 91 cm l
Dimensions Réelles	36.00 in w x 36.00 in l	91.44 cm w x 91.44 cm l
Épaisseur De La Couche d'Usure	22 mil (0.022 in)	0.56 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Installation Type	Loose Lay	
Installation	Direct Glue Or Perimeter Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pièces Par Carton	4 pcs	
Surface Par Carton	36 sq ft	3.34 sq m
Poids Par Carton	71.34 lbs	32.36 kg



Méthodes d'Installation Conseillées



Coordination Des Produits

LVT: Flow 2.5, Function 2.5

Performance + Tests Et Essai

Charge Statique (Astm F970)	Passes (Modified), *1500 lbs
Résistance À La Chaleur (Astm F1514)	Passes
Résistance À La Lumière (Astm F1515)	Passes
Résistance Chimique (Astm F925)	Passes
Panneau Rayonnant (Astm E648)	Passes, Class I

Ce Test Vise À Comparer Les Propriétés Relatives De Différents Styles Et Modes De Construction. Les Résultats Sont Basés Sur Des Tests En Laboratoire Et Utilisés À Des Fins Comparatives ; La Charge Réelle Peut Varier.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

Limitée Commerciale De 15 Ans
[Commercial 15 Year Underbed Bond Warranty](#)

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

Déclaration environnementale de produit (EPD)	Certifié Par Un Organisme Tiers Conformément Aux Normes ISO 14025, EN15804 & ISO 21930:2017
FloorScore®	Certifié
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
pays d'origine	Chine

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	FloorScore Certificate

Contribution À La Certification Leed

MR Credit: Building Product Disclosure and Optimisation Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified

[Installation Guidelines](#)
Maintenance Guidelines













Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Indice De Réflexion Lumineuse

					
 Smooth 85114 LRV 37.7 V3 - Moderate Variation	 Sandstone 85120 LRV 34.1 V3 - Moderate Variation	 Dense 85504 LRV 31.3 V3 - Moderate Variation	 Shale 85518 LRV 20.5 V3 - Moderate Variation	 Streamline 85520 LRV 28.6 V3 - Moderate Variation	 Molten 85585 LRV 13.7 V3 - Moderate Variation

 **Quick Ship** In Stock - UK

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302