

Flow 5.0 Lit

コレクション
スタイルナンバー
建設
クラス
仕上げ

Function + Flow

4419V

商業用高級ビニールタイル

Class III, Type B

ExoGuard+®

公称寸法

36 in w x 36 in l

メートル法

91 cm w x 91 cm l

実際の寸法

36.00 in w x 36.00 in l

91.44 cm w x 91.44 cm l

摩耗層の厚さ

22 mil (0.022 in)

0.56 mm

製品全体の厚さ

0.197 in

5 mm

Installation Type

Loose Lay

インストール

Direct Glue Or Perimeter Glue

推奨接着剤

S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon

包装


ボックスあたりの個数 **4 pcs**

ボックスあたりの面積 **36 sq ft**


3.34 sq m

ボックスあたりの重量 **71.34 lbs**


32.36 kg

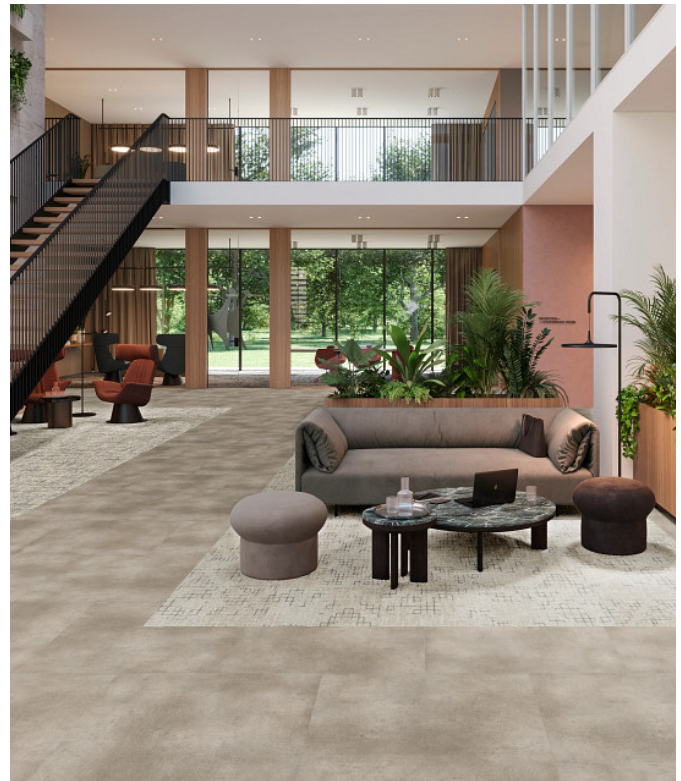


推奨インストール方法




Quarter Turn




Random



Monolithic



Brick



Ashlar

コーディネート商品

LVT: Function 5.0

パフォーマンス + テスト

静荷重 (ASTM F970)

Passes (Modified), *1500 lbs

耐熱性 (ASTM F1514)

Passes

耐光性 (ASTM F1515)

Passes

耐薬品性 (ASTM F925)

Passes

放射パネル (ASTM E648)

Passes, Class I

摩擦係数(ASTM D2407、滑り抵抗)

≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

15年の商用限定保証

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+認定

Health & Wellbeing

Indoor Air Quality

FloorScore® | 認証取得

Climate Impact

Environmental Product Declaration (EPD)

ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得

Embodied Carbon (Cradle to Gate)

11.59 Kg Co₂/M²

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | 中国

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore Certificate

グリーンリード貢献クレジット

- MRクレジット：製品の開示と最適化の構築
- 環境製品宣言-オプション1：環境製品宣言（EPD）
- EQクレジット：低排出材料
- オプション1：製品カテゴリの計算

- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore® Certified

Installation Guidelines







Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Smooth 85114	Sandstone 85120	Dense 85504	Shale 85518	Streamline 85520	Molten 85585
LRV 37.7 L* 67.77	LRV 34.1 L* 65.08	LRV 31.3 L* 62.78	LRV 20.5 L* 52.39	LRV 28.6 L* 60.4	LRV 13.7 L* 43.86
V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

