

Flow 5.0 Lt


수집	<b>Function + Flow</b>	
스타일 번호	<b>4419V</b>	
구성	<b>상용 고급 비닐타일</b>	
수업	<b>Class III, Type B</b>	
끝	<b>ExoGuard+®</b>	
	미국	미터법
공칭 치수	<b>36 in w x 36 in l</b>	<b>91 cm w x 91 cm l</b>
실제 치수	<b>36.00 in w x 36.00 in l</b>	<b>91.44 cm w x 91.44 cm l</b>
마모 층 두께	<b>22 mil (0.022 in)</b>	<b>0.56 mm</b>
전체 제품 두께	<b>0.197 in</b>	<b>5 mm</b>
Installation Type	<b>Loose Lay</b>	
설치	<b>Direct Glue Or Perimeter Glue</b>	
권장 접착제	<b>S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	

포장

상자 당 조각	<b>4 pcs</b>	
상자 당 면적	<b>36 sq ft</b>	<b>3.34 sq m</b>
상자 당 무게	<b>71.34 lbs</b>	<b>32.36 kg</b>



권장 설치 방법

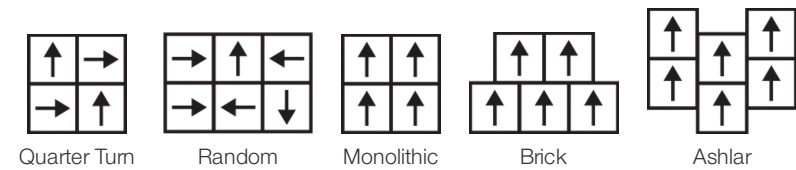

코디네이팅 제품

LVT: Function 5.0

공연 + 테스트

정적 하중 (Astm F970)  
내열성 (Astm F1514)  
내광성 (Astm F1515)  
화학 물질에 대한 내성 (Astm F925)  
복사 패널 (Astm E648)  
마찰 계수 (astm D2407, 미끄러짐 저항)

**Passes (Modified), \*1500 lbs**  
**Passes**  
**Passes**  
**Passes**  
**Passes, Class I**

**≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces**

이 테스트는 다양한 스타일과 구성의 상대적인 속성을 비교하기 위한 것입니다. 결과는 실험실 테스트를 기반으로 하며 비교 목적으로 사용됩니다. 실제 하중 한계는 다를 수 있습니다.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

보증

15년 상용 제한  
Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

속성 + 인증

Health & Wellbeing

Indoor Air Quality

FloorScore® | 인증

Climate Impact

Environmental Product Declaration (EPD)  
Total Recycled Content

ISO 14025, EN 15804 및 ISO 21930:2017에 따라 타사 인증 획득  
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축  
환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)  
EQ 크레딧 : 저 발광 재료  
옵션 1 : 제품 범주 계산







Installation Guidelines

Maintenance Guidelines

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore Certified

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Smooth 85114 LRV 37.7   L* 67.77 V3 - Moderate Variation	Sandstone 85120 LRV 34.1   L* 65.08 V3 - Moderate Variation	Dense 85504 LRV 31.3   L* 62.78 V3 - Moderate Variation	Shale 85518 LRV 20.5   L* 52.39 V3 - Moderate Variation	Streamline 85520 LRV 28.6   L* 60.4 V3 - Moderate Variation	Molten 85585 LRV 13.7   L* 43.86 V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

