

Flow 5.0 Lit

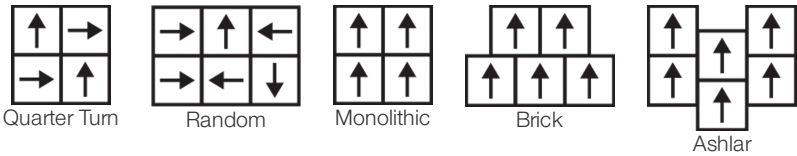
系列	Function + Flow	
款型编号	4419V	
结构	商用;Vt	
类型	Class III, Type B	
表面处理	ExoGuard+®	
	美国	尺寸标准
公称尺寸	36 in w x 36 in l	91 cm w x 91 cm l
实际尺寸	36.00 in w x 36.00 in l	91.44 cm w x 91.44 cm l
耐磨层厚度	22 mil (0.022 in)	0.56 mm
产品整体厚度	0.197 in	5 mm
Installation Type	Loose Lay	
安装方式	Direct Glue Or Perimeter Glue	
胶粘剂建议	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

每盒件数	4 pcs	
每箱面积	36 sq ft	3.34 sq m
每箱重量	71.34 lbs	32.36 kg



铺装建议



搭配产品

LVT: Function 5.0

性能 + 测试

静态载荷 (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
耐热性 (ASTM F1514)	Passes	
耐光性 (ASTM F1515)	Passes	
耐化学性 (ASTM F925)	Passes	
辐射板 (ASTM E648)	Passes, Class I	
摩擦系数 (ASTM D2407, 防滑性)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

质保

15年商用有限质保

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+认证

Health & Wellbeing

Indoor Air Quality

FloorScore® | 认证

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Total Recycled Content

通过ISO 14025、EN 15804和ISO 21930 : 2017等第三方认证

11.59 Kg CO₂/M²

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | 中国

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
FloorScore Certificate

绿色leed贡献信用

MR Credit : 建立产品披露和优化
环境产品声明-选项1 : 环境产品声明 (EPD)
EQ信用 : 低排放材料
选项1 : 产品类别计算

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified







Installation Guidelines
Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Smooth 85114	Sandstone 85120	Dense 85504	Shale 85518	Streamline 85520	Molten 85585
LRV 37.7 L* 67.77	LRV 34.1 L* 65.08	LRV 31.3 L* 62.78	LRV 20.5 L* 52.39	LRV 28.6 L* 60.4	LRV 13.7 L* 43.86
V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation	V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation

