


In Unison 2.5

|                      |  |                         |
|----------------------|--|-------------------------|
| Collection           | Cultura  |                         |
| Style Number         | 4430V  |                         |
| Construction         | Heavy Commercial Luxury Vinyl Tile   |                         |
| Class / ASTM F1700   | Class III, Type B  |                         |
| Finish               | ExoGuard+®   |                         |
|                      | U.s.   | Metric                  |
| Nominal Dimensions   | 9 in w x 36 in l   | 23 cm w x 91 cm l       |
| Actual Dimensions    | 9.00 in w x 36.00 in l   | 22.86 cm w x 91.44 cm l |
| Wear Layer Thickness | 20 mil (0.02 in)   | 0.51 mm                 |
| Overall Thickness    | 0.098 in   | 2.5 mm                  |
| Edge Profile         | Squared Edge   |                         |
| Installation Type    | Dry Back   |                         |
| Installation         | Direct Glue  |                         |
| Recommended Adhesive | S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon |                         |

Packaging

|                   |           |           |
|-------------------|-----------|-----------|
| Pieces Per Carton | 20 pcs    |           |
| Area Per Carton   | 45 sq ft  | 4.18 sq m |
| Weight Per Carton | 31.35 lbs | 14.22 kg  |

Recommended Installation Method

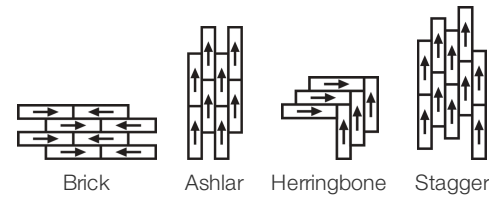

Coordinating Products

LVT: In Unison 5.0, Crossing Paths 5.0, Crossing Paths 2.5  
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile  
Broadloom: Braided Broadloom, Valle Broadloom

Performance + Testing

|  |   |  |
|--|---|--|
| Static Load (Astm F970)  | Passes (Modified), *1500 lbs  | *This Test Is Intended To Compare Relative Properties Of Different Styles And Constructions. Results Are Based On A Laboratory Test And Used For Comparative Purposes - Real Life Load Limit May Vary. |
| Residual Indentation (Astm F1914)  | Passes  |  |
| Resistance To Heat (Astm F1514)  | Passes  |  |
| Resistance To Light (Astm F1515)   | Passes  |  |
| Resistance To Chemicals (Astm F925)  | Passes  |  |
| Radiant Panel (Astm E648)  | Passes, Class I   |  |
| Coefficient Of Friction (Astm D2407, Slip Resistance)  | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |  |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. |   |  |

Warranties

- 15 Year Commercial Limited
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw’s diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Material Health & Environmental Certifications

|   |  |
|---|--|
| Climate Impact                          |  |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Total Recycled Content                  | 20% (Pre-Consumer 20%   Post-Consumer 0%)                                    |
| Global Product Assessment               | Country of Origin   Imported   |

Green Leed Contribution Credit

|  |   |
|--|---|
| MR Credit: Building Product Disclosure and Optimization                                | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  |
| Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) |   |
| Installation Guidelines  | Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.<br><br>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.<br>*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.<br><br>Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information. |
| Maintenance Guidelines   |   |
|  |   |
|  |   |
|  |   |

Available Colorways



Eggshell 91111  
V2 - Slight Variation



Spindle 91140  
V2 - Slight Variation



Sandy Dune 91240  
V2 - Slight Variation



Link 91375  
V2 - Slight Variation



Unify 91450  
V2 - Slight Variation



Together 91475  
V2 - Slight Variation



Smoky Oak 91516  
V2 - Slight Variation



Caster 91518  
V2 - Slight Variation



Gesso 91520  
V2 - Slight Variation



Include 91680  
V2 - Slight Variation



Merge 91700  
V2 - Slight Variation



Thatch 91720  
V2 - Slight Variation



Grove 91737  
V2 - Slight Variation



Summit 91760  
V2 - Slight Variation



Join 91895  
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

