


In Unison 2.5

| | | |
|--------------------------------|---|-------------------------|
| Collection | Cultura | |
| Numéro De Style | 4430V | |
| Construction | Carreau De Vinyle De Luxe Commercial Lourd | |
| classe | Class III, Type B | |
| Finition | ExoGuard+® | |
| | Impérial | Métrique |
| Dimensions Nominales | 9 in w x 36 in l | 23 cm w x 91 cm l |
| Dimensions Réelles | 9.00 in w x 36.00 in l | 22.86 cm w x 91.44 cm l |
| Épaisseur De La Couche d'Usure | 20 mil (0.02 in) | 0.51 mm |
| Épaisseur Générale Du Produit | 0.098 in | 2.5 mm |
| Profil Du Bord | Bord Carré | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Adhésif Recommandé | S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon | |

Emballage

| | | |
|--------------------|-----------|-----------|
| Pièces Par Carton | 20 pcs | |
| Surface Par Carton | 45 sq ft | 4.18 sq m |
| Poids Par Carton | 31.35 lbs | 14.22 kg |

Méthodes d'Installation Conseillées

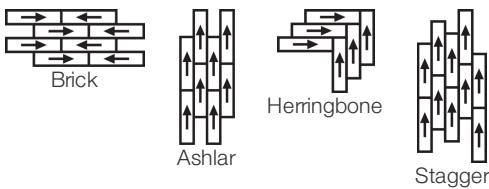

Coordination Des Produits

LVT: In Unison 5.0, Crossing Paths 5.0, Crossing Paths 2.5
Carpet Tile: Alban Tile, Hand Woven Tile, Local Tile, Sierra Tile, Casa Tile, Cross Weave Tile
Broadloom: Braided Broadloom, Valle Broadloom

performance + Tests et essai

| | | |
|--|------------------------------|--|
| charge statique (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| poinçonnement rémanent (ASTM F1914) | Passes | |
| résistance à la chaleur (ASTM F1514) | Passes | |
| résistance à la lumière (ASTM F1515) | Passes | |
| résistance chimique (ASTM F925) | Passes | |
| Essai au panneau radiant (Astm E648) | Passes, Class I | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |
| coefficient de frottement (ASTM D2407, résistance au glissement) | | |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Limitée Commerciale De 15 Ans](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017

Embodied Carbon (Cradle to Gate)

7.31 Kg CO₂/M²

Life-Cycle Carbon Emissions

Low Embodied Carbon

Total Recycled Content

20% (Pre-Consumer 20% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

| | |
|---|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt | Absence of Heavy Metals |
| X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt | Absence of Halogenated Flame Retardants |
| Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt | Ortho-Phthalates |
| X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt | FloorScore Certificate |

Contribution Au Certificat Vert Leed

| | |
|---|--|
| « Crédit MR : Divulgateion et optimisation des produits de construction | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Installation Guidelines Maintenance Guidelines | <p>Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.</p> <p>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.</p> <p>Visit shawcontract.com/testing for more information.</p> |

Available Colorways



Eggshell 91111
V2 - Slight Variation



Spindle 91140
V2 - Slight Variation



Sandy Dune 91240
V2 - Slight Variation



Link 91375
V2 - Slight Variation



Unify 91450
V2 - Slight Variation



Together 91475
V2 - Slight Variation



Smoky Oak 91516
V2 - Slight Variation



Caster 91518
V2 - Slight Variation



Gesso 91520
V2 - Slight Variation



Include 91680
V2 - Slight Variation



Merge 91700
V2 - Slight Variation



Thatch 91720
V2 - Slight Variation



Grove 91737
V2 - Slight Variation



Summit 91760
V2 - Slight Variation



Join 91895
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

