

Style Number	4446V	
Product Type	Heavy Commercial Luxury Vinyl Tile	
Collection	Nordic	
Construction	Standard	Data + Performance
Type of Floorcovering	EN 1307	Vinyl Tile
Classification	ISO 10874	class 33 heavy commercial use
Total Mass	EN ISO 23997	4.04 kg/m²
Total Thickness	EN ISO 24346	2.5 mm
Finish		ExoGuard+®
Dimensions	EN 994	18.42 cm x 121.92 cm 16 tiles (3.59 sq m) per box
Weight per Box		15.61 kg




Performance


Flammability	EN 13501-1	Bfl-S1 (unadhered testing)
Thermal Resistance m ² K/W	ISO 8302	0.013 m² K/W
Electrostatic Propensity	EN 1815	≤ 2.0 kV (stroll test)
Slip Resistance	BS 7976-2 DIN 51130	PTV Dry 46 PTV Wet 32 (pendulum) R10 (shod ramp)
Dimensional Stability	EN ISO 23999	≤0.15%
Castor Chair	EN 425, ISO 4918	no damage
Impact Sound Reduction	BS EN ISO 10140	ΔLw 4dB/21dB with 2mm underlay
Sound Absorption	ISO 354	0.013 m² K/W
Colour Fastness to Light	BS EN ISO 105-BO2	7
Emissions	ISO 16000	Yes

15 Year Commercial Limited Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Recommended Installation Method

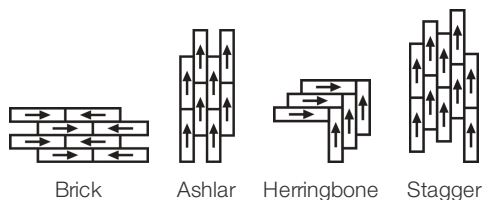


colour and visual variation index

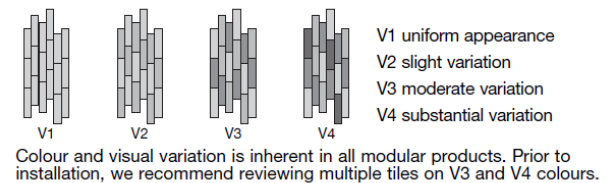






Coordinating Products

LVT: Nordic 5.0



ΔLw 4dB/21dB with 2mm underlay

 22 EU.DOP/1658/CPR/1222/1222/LVT SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL NETHERLANDS (NLD) Notified Body 1658	 22 UK.DOP/0321/CPR/1222/1222/LVT SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM Approved Body 1658	
 E1 HCHO	 Bfl-s1	
For use as an indoor floor covering as specified by the manufacturer		

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Material Health & Environmental Certifications

FloorScore®	Certified
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Country of Origin	China

Leed v4 Contribution Credits

EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified
Installation Guidelines Maintenance Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit shawcontract.com/testing for more information.

Light Reflectance Value

 Honey 77103 LRV 26.8 L* 58.83 V2 - Slight Variation	 Alder 77104 LRV 25.5 L* 57.57 V3 - Moderate Variation	 Blonde 77112 LRV 37.6 L* 67.73 V2 - Slight Variation	 Driftwood 77120 LRV 30.6 L* 62.16 V3 - Moderate Variation	 Birch 77140 LRV 35.8 L* 66.35 V2 - Slight Variation	 Fir 77155 LRV 42 L* 70.85 V2 - Slight Variation
 Radiant 77710 LRV 21.1 L* 53.08 V2 - Slight Variation	 Redwood 77720 LRV 22 L* 54.07 V2 - Slight Variation	 Elm 77721 LRV 22.7 L* 54.81 V2 - Slight Variation	 Golden 77756 LRV 15.2 L* 45.94 V3 - Moderate Variation		

 **Quick Ship** In Stock - UK

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
-----------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------

