

Numéro Du Style	4446V	
Type De Produit	Heavy Commercial Luxury Vinyl Tile	
Collection	Nordic	
Construction	Standard	Données + Performance
Type of Floorcovering	EN 1307	Vinyl Tile
Classification	ISO 10874	class 33 heavy commercial use
Poids Total	EN ISO 23997	4.04 kg/m <sup>2</sup>
Epaisseur Du Velours	EN ISO 24346	2.5 mm
Dimensions	EN 994	18.42 cm x 121.92 cm   16 tiles (3.59 sq m) per box
Poids Par Carton		15.61 kg




Performance

Inflamabilité	EN 13501-1	Bfl-S1 (unadhered testing)
Résistance Thermique m <sup>2</sup> K/w	ISO 8302	0.013 m <sup>2</sup> K/W
Propension Électrostatique	EN 1815	≤ 2.0 kV (stroll test)
Capacités Antidérapantes	BS 7976-2 DIN 51130	PTV Dry 46   PTV Wet 32 (pendulum) R10 (shod ramp)
Stabilité Dimensionnelle	EN ISO 23999	≤0.15%
Chaise À Roulette	EN 425, ISO 4918	no damage
Impact Sound Reduction	BS EN ISO 10140	ΔLw 4dB/21dB with 2mm underlay
Absorption Acoustique	ISO 354	0.013 m <sup>2</sup> K/W
Résistance De La Couleur À La Lumière	BS EN ISO 105-BO2	7
Émissions	ISO 16000	Yes

Limitée Commerciale De 15 Ans subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Méthodes d'Installation Conseillées

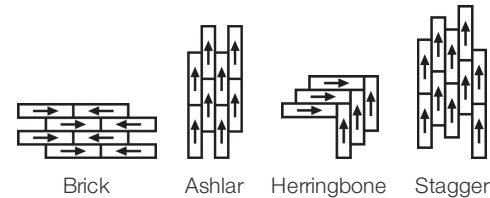

colour and visual variation index

V1

V2

V3

V4

V1 uniform appearance  
V2 slight variation  
V3 moderate variation  
V4 substantial variation

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

Coordination Des Produits

LVT: Nordic 5.0

ΔLw 4dB/21dB with 2mm underlay

CE

22

EU.DOP/1658/CPR/1222/1222/LVT

SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL  
NETHERLANDS (NLD)

Notified Body 1658

UK

CA

22

UK.DOP/0321/CPR/1222/1222/LVT

SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 1658

E1

HCHO

Bfl-s1

For use as an indoor floor covering as specified by the manufacturer

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

FloorScore®	<a href="#">Certifié</a>
Total Recycled Content	<b>0% (Pre-Consumer 0%   Post-Consumer 0%)</b>
pays d'origine	<b>Chine</b>

Contribution À La Certification Leed

"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	<b>FloorScore Certified</b>
<a href="#">Installation Guidelines</a> <a href="#">Maintenance Guidelines</a>	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

Indice De Réflexion Lumineuse

 <div>Honey 77103 LRV 26.8   L* 58.83 V2 - Slight Variation</div>	 <div>Alder 77104 LRV 25.5   L* 57.57 V3 - Moderate Variation</div>	 <div>Blonde 77112 LRV 37.6   L* 67.73 V2 - Slight Variation</div>	 <div>Driftwood 77120 LRV 30.6   L* 62.16 V3 - Moderate Variation</div>	 <div>Birch 77140 LRV 35.8   L* 66.35 V2 - Slight Variation</div>	 <div>Fir 77155 LRV 42   L* 70.85 V2 - Slight Variation</div>
 <div>Radiant 77710 LRV 21.1   L* 53.08 V2 - Slight Variation</div>	 <div>Redwood 77720 LRV 22   L* 54.07 V2 - Slight Variation</div>	 <div>Elm 77721 LRV 22.7   L* 54.81 V2 - Slight Variation</div>	 <div>Golden 77756 LRV 15.2   L* 45.94 V3 - Moderate Variation</div>		

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1  Uniform Appearance	V2  Slight Variation	V3  Moderate Variation	V4  Substantial Variation
---	--	---	--

