

Nordic 2.5


Coleção	Nordic	
Número Do Produto	4446V	
Construção	Heavy Commercial Luxury Vinyl Tile	
classe		
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	7 in w x 48 in l	18 cm w x 122 cm l
Dimensões Reais	7.25 in w x 48.00 in l	18.42 cm w x 121.92 cm l
Espessura Da Camada De Uso	22 mil (0.022 in)	0.56 mm
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Micro-Chanfrado	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	16 pcs	
Área Por Caixa	38.66 sq ft	3.59 sq m
Peso Por Caixa	34.42 lbs	15.61 kg



Método De Instalação Recomendado

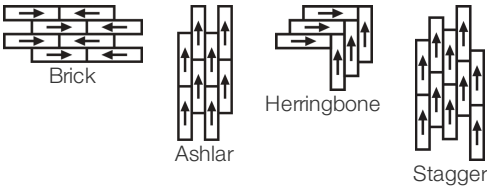

Produtos Coordenados

LVT: Nordic 5.0

desempenho + teste

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
recuo residual (ASTM F1914)	Passes	
resistência ao calor (ASTM F1514)	Passes	
resistência à luz (ASTM F1515)	Passes	
resistência a produtos químicos (ASTM F925)	Passes	
painel radiante (ASTM E648)	Passes, Class I	
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

15 Anos Comercial Limitada

Atributos + Certificações

Health & Wellbeing

Indoor Air Quality

FloorScore® | Certificado

Climate Impact

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | China

Crédito De Contribuição

Crédito de EQ: Materiais de baixa emissão
Opção 1: cálculos de categoria de produto

FloorScore® Certified

Installation Guidelines
Maintenance Guidelines


Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways

					
Aspen 77100 LRV 54.5 L* 78.76 V2 - Slight Variation	Natural 77101 LRV 42.2 L* 71.03 V2 - Slight Variation	Honey 77103 LRV 26.8 L* 58.83 V2 - Slight Variation	Alder 77104 LRV 25.5 L* 57.57 V3 - Moderate Variation	Calm 77111 LRV 36.8 L* 67.16 V2 - Slight Variation	Blonde 77112 LRV 37.6 L* 67.73 V2 - Slight Variation
					
Driftwood 77120 LRV 30.6 L* 62.16 V3 - Moderate Variation	Birch 77140 LRV 35.8 L* 66.35 V2 - Slight Variation	Fir 77155 LRV 42 L* 70.85 V2 - Slight Variation	Radiant 77710 LRV 21.1 L* 53.08 V2 - Slight Variation	Redwood 77720 LRV 22 L* 54.07 V2 - Slight Variation	Elm 77721 LRV 22.7 L* 54.81 V2 - Slight Variation

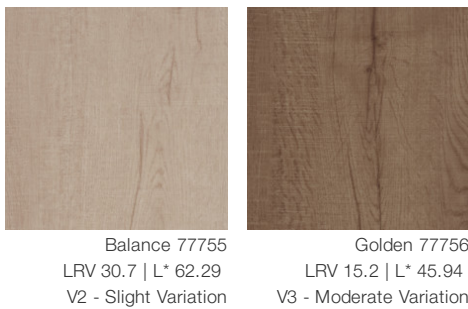


Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1


Uniform Appearance

V2

Slight Variation

V3

Moderate Variation

V4

Substantial Variation

