

Nordic 2.5


Collection	Nordic	
Style Number	4446V	
Aspect class	Heavy Commercial Luxury Vinyl Tile	
Finish	ExoGuard+®	
	Metric	U.S.
Nominal Dimensions	18 cm w x 122 cm l	7 in w x 48 in l
Actual Dimensions	18.42 cm w x 121.92 cm l	7.25 in w x 48.00 in l
Wear Layer Thickness	0.56 mm	22 mil (0.022 in)
Overall Product Thickness	2.5 mm	0.098 in
Edge Profile	Micro-Bevel	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces Per Box	16 pcs	
Area Per Box	3.59 sq m	38.66 sq ft
Weight Per Box	15.61 kg	34.42 lbs



Recommended Installation Method

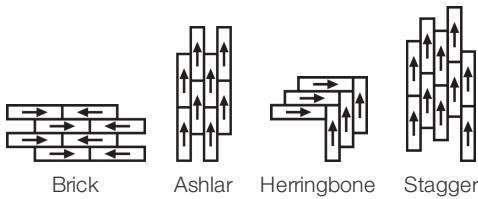

Coordinating Products

LVT: Nordic 5.0

Performance + Testing

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited
[Commercial 15 Year Underbed Bond Warranty](#)

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.













Material Health & Environmental Certifications


FloorScore®	Certified
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Country of Origin	China

Leed v4 Contribution Credits

EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified
Installation Guidelines Maintenance Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. Visit shawcontract.com/testing for more information.

Light Reflectance Value

 Aspen 77100 LRV 54.5 V2 - Slight Variation	 Natural 77101 LRV 42.2 V2 - Slight Variation	 Honey 77103 LRV 26.8 V2 - Slight Variation	 Alder 77104 LRV 25.5 V3 - Moderate Variation	 Calm 77111 LRV 36.8 V2 - Slight Variation	 Blonde 77112 LRV 37.6 V2 - Slight Variation
 Driftwood 77120 LRV 30.6 V3 - Moderate Variation	 Birch 77140 LRV 35.8 V2 - Slight Variation	 Fir 77155 LRV 42 V2 - Slight Variation	 Radiant 77710 LRV 21.1 V2 - Slight Variation	 Redwood 77720 LRV 22 V2 - Slight Variation	 Elm 77721 LRV 22.7 V2 - Slight Variation

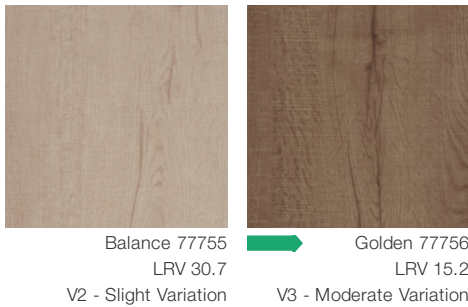

 **Quick Ship** In Stock - UK

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

