

Nordic 2.5

Numéro Du Style	4446V	
Type De Produit	Heavy Commercial Luxury Vinyl Tile	
Collection	Nordic	
Construction	Standard	Données + Performance
Type of Floorcovering	EN 1307	Vinyl Tile
Classification	ISO 10874	33 heavy commercial
Poids Total	EN ISO 23997	4.04 kg/m²
Epaisseur Du Velours	EN ISO 24346	2.5 mm
Dimensions	EN 994	18.42 cm x 121.92 cm   16 tiles (3.59 sq m) per box
Poids Par Carton		15.61 kg




Performance

Inflamabilité	EN 13501-1	Bfl-S1 (unadhered testing)
Résistance Thermique m² K/w	ISO 8302	0.013 m² K/W
Propension Électrostatique	EN 1815	≤ 2.0 kV (stroll test)
Capacités Antidérapantes	BS 7976-2	
	DIN 51130	R10 (shod ramp)
Stabilité Dimensionnelle	EN ISO 23999	≤0.15%
Chaise À Roulette	EN 425, ISO 4918	continuous use
Indentation Résiduelle	EN ISO 24343-1	0.08 mm
Impact Sound Reduction	BS EN ISO 10140	ΔLw 4dB/21dB with 2mm underlay
Absorption Acoustique	ISO 354	
Résistance De La Couleur À La Lumière	BS EN ISO 105-BO2	7

Limitée Commerciale De 15 Ans, [Commercial 15 Year Underbed Bond Warranty](#) subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Méthodes d'Installation Conseillées

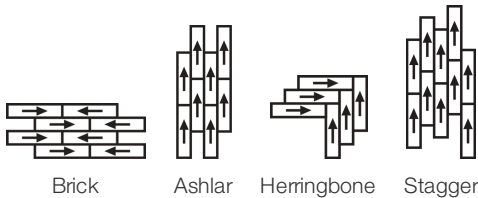

colour and visual variation index


V1 V2 V3 V4

V1 uniform appearance  
V2 slight variation  
V3 moderate variation  
V4 substantial variation

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.

Coordination Des Produits

LVT: Nordic 5.0



ΔLw 4dB/21dB with 2mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

CE

22

EU.DOP/1658/CPR/1222/1222/LVT

SHAW EUROPE LIMITED VAARTWEG 10, 4905 BL  
NETHERLANDS (NLD)

Notified Body 1658

UK

CA

22

UK.DOP/0321/CPR/1222/1222/LVT

SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 1658

E1

HCHO

Bfl-s1

For use as an indoor floor covering as specified by the manufacturer

Transparence du produit

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributs + Certifications

FloorScore®	Certifié
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
pays d'origine	Chine

Contribution À La Certification Leed

"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified
Installation Guidelines Maintenance Guidelines	<p>Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.</p> <p>Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.</p> <p>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.</p> <p>*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.</p> <p>Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.</p>

Indice De Réflexion Lumineuse


 <div>Aspen 77100 LRV 54.5 V2 - Slight Variation</div>	 <div>Natural 77101 LRV 42.2 V2 - Slight Variation</div>	 <div>Honey 77103 LRV 26.8 V2 - Slight Variation</div>	 <div>Alder 77104 LRV 25.5 V3 - Moderate Variation</div>	 <div>Calm 77111 LRV 36.8 V2 - Slight Variation</div>	 <div>Blonde 77112 LRV 37.6 V2 - Slight Variation</div>
 <div>Driftwood 77120 LRV 30.6 V3 - Moderate Variation</div>	 <div>Birch 77140 LRV 35.8 V2 - Slight Variation</div>	 <div>Fir 77155 LRV 42 V2 - Slight Variation</div>	 <div>Radiant 77710 LRV 21.1 V2 - Slight Variation</div>	 <div>Redwood 77720 LRV 22 V2 - Slight Variation</div>	 <div>Elm 77721 LRV 22.7 V2 - Slight Variation</div>



### Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation