

## Joy Squared 12x48


Collection	<b>Joy Squared</b>	
Numéro De Style	<b>4495V</b>	
Construction	<b>Carreau De Vinyle De Luxe Commercial Lourd</b>	
classe	<b>Class III, Type B</b>	
Finition	<b>ExoGuard+®</b>	
	Impérial	Métrique
Dimensions Nominales	<b>12 in w x 48 in l</b>	<b>30 cm w x 122 cm l</b>
Dimensions Réelles	<b>12.00 in w x 48.00 in l</b>	<b>30.48 cm w x 121.92 cm l</b>
Épaisseur De La Couche d'Usure	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
Épaisseur Générale Du Produit	<b>0.098 in</b>	<b>2.5 mm</b>
Profil Du Bord	<b>Bord Carré</b>	
Installation Type	<b>Dry Back</b>	
Installation	<b>Direct Glue</b>	
Adhésif Recommandé	<b>S150 95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon</b>	



### Emballage

Pièces Par Carton	<b>17 pcs</b>	
Surface Par Carton	<b>68 sq ft</b>	<b>6.32 sq m</b>
Poids Par Carton	<b>57.79 lbs</b>	<b>26.21 kg</b>

### Méthodes d'Installation Conseillées

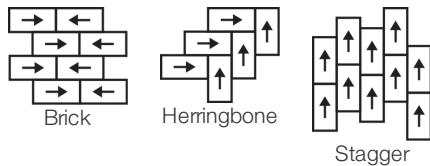

### Coordination Des Produits

LVT: Joy Squared

### performance + Tests et essai

charge statique (ASTM F970)  
 poinçonnement rémanent (ASTM F1914)  
 résistance à la chaleur (ASTM F1514)  
 résistance à la lumière (ASTM F1515)  
 résistance chimique (ASTM F925)  
 Essai au panneau radiant (Astm E648)  
 coefficient de frottement (ASTM D2407,  
 résistance au glissement)

**Passes (Modified), \*1500 lbs**

**Passes**

**Passes**

**Passes**

**Passes**

**Passes, Class I**

**>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes**

\*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garanties

[Commercial Limited Underbed Bond Warranty S150/4151/Lokworx+ Resilient](#)  
[Limitée Commerciale De 15 Ans](#)

## Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

### Health & Wellbeing

Material Ingredient Transparency  
 Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
 FloorScore® | Agréé

### Climate Impact

Environmental Product Declaration (EPD)  
 Embodied Carbon (Cradle to Gate)  
 Total Recycled Content

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017  
 9.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
 30% (Pre-Consumer 30% | Post-Consumer 0%)

### Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost To The Customer.  
 Country of Origin | United States

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
 X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt  
 X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt  
 Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt  
 X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
**Ortho-Phthalates**  
**FloorScore Certificate**

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulcation et optimisation des produits de construction  
 « Crédit MR : Divulcation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

## Informations Supplémentaires

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways




Snow Day 93100  
V2 - Slight Variation




Beach 93160  
V2 - Slight Variation



Playground 93250  
V2 - Slight Variation




Song 93270  
V2 - Slight Variation




Sun 93290  
V2 - Slight Variation




Bouquet 93310  
V2 - Slight Variation



Park 93360  
V2 - Slight Variation




Grass 93375  
V2 - Slight Variation




Treehouse 93385  
V2 - Slight Variation




Spring 93390  
V2 - Slight Variation




Sky 93405  
V2 - Slight Variation




Pool 93410  
V2 - Slight Variation




Bubble 93415  
V2 - Slight Variation



Summer 93470  
V2 - Slight Variation




Snooze 93490  
V2 - Slight Variation




Holiday 93500  
V2 - Slight Variation



Tire Swing 93520  
V2 - Slight Variation




Bicycle 93560  
V2 - Slight Variation




Firefly 93595  
V2 - Slight Variation




Firework 93680  
V2 - Slight Variation




Backyard 93761  
V2 - Slight Variation



Balloon 93890  
V2 - Slight Variation



Carousel 93895  
V2 - Slight Variation



Sprinkle 93995  
V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

