

Pivot

Style Number	4499V	
Product Type	Heavy Commercial Pvc-Free Ecoworx Resilient	
Collection	Art + Science	
Construction	Standard	Data + Performance
Type of Floorcovering	EN 1307	EcoWorx resilient
Classification	ISO 10874	class 34 very heavy commercial use
Total Mass	EN ISO 23997	3.49 kg/m ²
Total Thickness	EN ISO 24346	2.5 mm
Finish		ExoGuard+®
Dimensions	EN 994	21.01 cm x 129.01 cm 16 tiles (4.33 sq m) per box
Weight per Box		16.52 kg





Performance

Flammability	EN 13501-1	Bfl-S1
Thermal Resistance m ² K/W	ISO 8302	0.013 m ² K/W
Slip Resistance	BS 7976-2	Woodgrain Emboss: PTV Dry 58 PTV Wet 52 (pendulum)
	DIN 51130	R10
Dimensional Stability	EN ISO 23999	≤0.15%
Castor Chair	EN 425, ISO 4918	no damage
Impact Sound Reduction	BS EN ISO 10140	ΔLw 9dB/20dB with 2mm underlay
Colour Fastness to Light	BS EN ISO 105-BO2	8

15 Year Commercial Limited System Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Recommended Installation Method

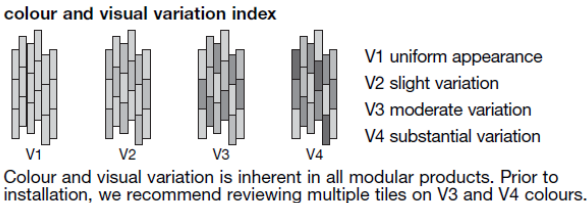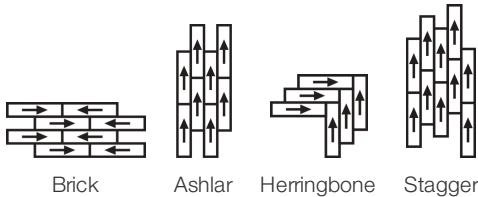


Coordinating Products

PVC-Free: Observe

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Engineered Hardwood products are Cradle to Cradle Certified™ Silver and assessed for impacts on human health and the environment.



ΔLw 9dB/20dB with 2mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

Material Health & Environmental Certifications

Greenhealth Approved

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Declare

Environmental Guarantee

Yes**1000 ppm Disclosure****in Accordance with ISO 14025:2006 And EN 15804:2012+a2:2019/Ac:2021****5.2 Kg Co₂/M²****Carbon Neutral****LBC Compliant****Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.****25% (Pre-Consumer 0% | Post-Consumer 25%)****Germany**

Total Recycled Content

Country of Origin**

WELL V2 Contribution Credit

X01 Fundamental Material Precautions

Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction

Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction

Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control

Part 2: Flooring Optimization

X14 Material Transparency

Part 1: Promote Ingredient Disclosure Optimization

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates Free****Green Guard Gold Certified****Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization

Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)[Maintenance](#)Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Light Reflectance Value

 <div>Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation</div>	 <div>Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation</div>	 <div>Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation</div>	 <div>Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation</div>	 <div>Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation</div>	 <div>Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation</div>
 <div>Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation</div>	 <div>New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation</div>	 <div>Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation</div>	 <div>Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation</div>	 <div>Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation</div>	 <div>Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation</div>
 <div>Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation</div>	 <div>Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation</div>	 <div>Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation</div>			

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

