

Pivot


Collection	Art + Science	
Style Number	4499V	
Construction	Heavy Commercial Pvc-Free Ecoworx Resilient	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	8 in w x 51 in l	21 cm w x 129 cm l
Actual Dimensions	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Micro-Bevel	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient 1 Gallon or 4200 Resilient 4 Gallon	

Packaging

Pieces per Carton	16 pcs	
Area per Carton	46.65 sq ft	4.33 sq m
Weight per Carton	36.431 lbs	16.52 kg



Recommended Installation Method

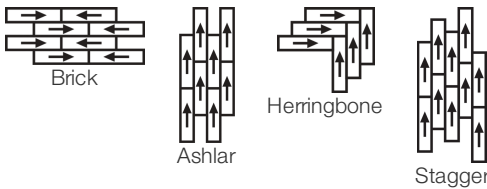

Coordinating Products

PVC-Free: Observe, Experiment

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *2500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved Yes Health Product Declaration (HPD) 1000 ppm Disclosure Declare LBC Compliant
Climate Impact	
Environmental Product Declaration (EPD)	in Accordance with ISO 14025:2006 And EN 15804:2012+a2:2019/Ac:2021
Embodied Carbon (Cradle to Gate)	5.2 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	25% (Pre-Consumer 0% Post-Consumer 25%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer. GSA Approved Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates Free
X11 Long Term Emissions Control Part 2: Flooring Optimization	Green Guard Gold Certified
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	Health Product Declaration (HPD) 1000 Ppm Disclosure

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)

[Maintenance](#)

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

 <div>Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation</div>	 <div>Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation</div>	 <div>Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation</div>	 <div>Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation</div>	 <div>Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation</div>	 <div>Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation</div>
 <div>Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation</div>	 <div>New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation</div>	 <div>Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation</div>	 <div>Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation</div>	 <div>Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation</div>	 <div>Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation</div>
 <div>Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation</div>	 <div>Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation</div>	 <div>Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation</div>			

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

