

Pivot


Collection	Art + Science	
Style Number	4499V	
Construction	Heavy Commercial Pvc-Free Ecoworx™ Resilient	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	8 in w x 51 in l	21 cm w x 129 cm l
Actual Dimensions	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Micro-Bevel	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient 1 Gallon or 4200 Resilient 4 Gallon	

Packaging

Pieces Per Carton	16 pcs	
Area Per Carton	46.65 sq ft	4.33 sq m
Weight Per Carton	36.431 lbs	16.52 kg



Recommended Installation Method

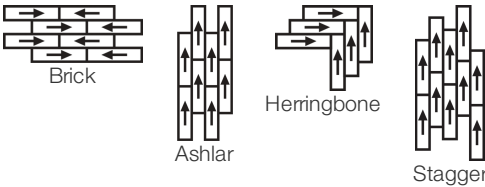

Coordinating Products

PVC-Free: Observe, Experiment

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
coefficient of friction (ASTM D2407, slip resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency

Greenhealth Approved | Yes
Health Product Declaration (HPD) | 1000 ppm Disclosure
Declare | LBC Compliant

Climate Impact

Environmental Product Declaration (EPD)

in Accordance with ISO 14025:2006 And EN 15804:2012+a2:2019/Ac:2021

Embodied Carbon (Cradle to Gate)

5.2 Kg Co₂/M²

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

25% (Pre-Consumer 0% | Post-Consumer 25%)

Global Product Assessment

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.
Country of Origin | Imported

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
- X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
- Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
- X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
- X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

- Absence of Asbestos**
- Absence of Heavy Metals**
- Absence of Halogenated Flame Retardants**
- Ortho-Phthalates Free**
- Green Guard Gold Certified**
- Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Green Leed Contribution Credit

- MR Credit: Building Product Disclosure and Optimization
- Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 1000 Ppm Disclosure
















Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).
**Meets or exceeds all local and national regulations in country of manufacture.

- [Installation](#)
- [Maintenance](#)

Please visit [www.shawcontract.com](#) for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.
Visit [shawcontract.com/testing](#) for more information.


Available Colorways

					
Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation	Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation	Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation	Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation	Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation	Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation
					
Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation	New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation	Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation	Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation	Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation	Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation
					
Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation	Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation	Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation			

 **Quick Ship** 4 Weeks

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Declare.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
July 2, 2025

3 of 3