


Pivot

Colección	Art + Science	
Número De Estilo	4499V	
Construcción	Heavy Commercial Pvc-Free Ecoworx™ Resilient	
clase		
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	8 in w x 51 in l	21 cm w x 129 cm l
Dimensiones Reales	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Micro-Biselado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	4200 Resilient 1 Gallon or 4200 Resilient 4 Gallon	
Embalaje		
Piezas Por Caja	16 pcs	
Área Por Caja	46.65 sq ft	4.33 sq m
Peso Por Caja	36.431 lbs	16.52 kg



Método De Instalación Recomendado

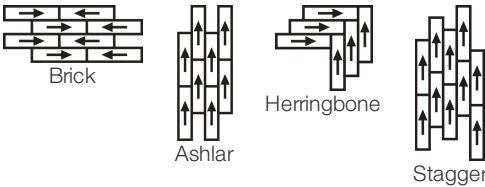

Productos Que Combinan

PVC-Free: Observe, Experiment

desempeño + pruebas

resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
resistencia a productos químicos (ASTM F925)	Passes
panel radiante (ASTM E648)	Passes, Class I
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garantías

[1 Year Commercial Limited Warranty](#)
[25 Year Commercial System Warranty](#)

## Atributos + Certificaciones

## Health &amp; Wellbeing

Material Ingredient Transparency

Greenhealth Approved | Yes  
Health Product Declaration (HPD) | 1000 ppm Disclosure  
Declare | Compatible LBC

## Climate Impact

Environmental Product Declaration (EPD)

in Accordance with ISO 14025:2006 And EN  
15804:2012+a2:2019/Ac:2021

Embodied Carbon (Cradle to Gate)

5.2 Kg CO<sub>2</sub>/M<sup>2</sup>

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

25% (Pre-Consumer 0% | Post-Consumer 25%)

## Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee,  
Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within  
The United States And Canada At No Cost to The Customer.

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

**Absence of Asbestos**

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

**Absence of Heavy Metals**

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

**Absence of Halogenated Flame Retardants**

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

**Ortho-Phthalates Free**

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Green Guard Gold Certified**

X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

## Información Adicional

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

[Maintenance](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

					
Reform 00111 LRV 33.0   L* 64.13 V3 - Moderate Variation	Mindset 00115 LRV 41.4   L* 70.46 V2 - Slight Variation	Reclaim 00121 LRV 29.5   L* 61.24 V2 - Slight Variation	Climate 00125 LRV 25.4   L* 57.42 V2 - Slight Variation	Reuse 00140 LRV 38.5   L* 68.38 V2 - Slight Variation	Value 00144 LRV 41.8   L* 70.76 V3 - Moderate Variation
					
Renew 00155 LRV 23.6   L* 55.70 V3 - Moderate Variation	New Growth 00240 LRV 27.1   L* 59.07 V2 - Slight Variation	Change 00504 LRV 43.7   L* 72.03 V4 - Substantial Variation	Resilience 00570 LRV 13.1   L* 42.95 V3 - Moderate Variation	Process 00575 LRV 16.4   L* 47.45 V2 - Slight Variation	Native 00720 LRV 21.8   L* 53.81 V2 - Slight Variation
					
Ecology 00730 LRV 20.2   L* 52.05 V2 - Slight Variation	Earthen 00740 LRV 14.1   L* 44.39 V3 - Moderate Variation	Future 00750 LRV 15.3   L* 45.98 V2 - Slight Variation			

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

