

Pivot


Collection	Art + Science	
Numéro De Style	4499V	
Construction	Heavy Commercial Pvc-Free Ecoworx™ Resilient	
classe		
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	8 in w x 51 in l	21 cm w x 129 cm l
Dimensions Réelles	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Profil Du Bord	Micro-Biseau	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	4200 Resilient 1 Gallon or 4200 Resilient 4 Gallon	

Emballage

Pièces Par Carton	16 pcs	
Surface Par Carton	46.65 sq ft	4.33 sq m
Poids Par Carton	36.431 lbs	16.52 kg



Méthodes d'Installation Conseillées

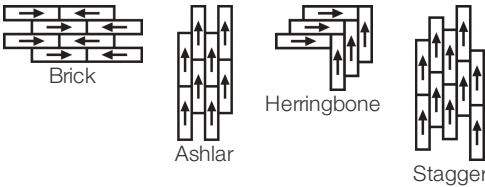

Coordination Des Produits

PVC-Free: Observe, Experiment

performance + Tests et essai

résistance à la chaleur (ASTM F1514)	Passes
résistance à la lumière (ASTM F1515)	Passes
résistance chimique (ASTM F925)	Passes
Essai au panneau radiant (Astm E648)	Passes, Class I
coefficient de frottement (ASTM D2407, résistance au glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[1 Year Commercial Limited Warranty](#)
[25 Year Commercial System Warranty](#)

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Greenhealth Approved | Yes
 Health Product Declaration (HPD) | 1000 ppm Disclosure
 Declare | Conforme LBC

Indoor Air Quality

Greenguard Gold | Agréé

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, And ISO 21930

Embodied Carbon (Cradle to Gate)

5.2 Kg CO₂/M²

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

25% (Pre-Consumer 0% | Post-Consumer 25%)

Global Product Assessment

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

Absence of Asbestos

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

Absence of Heavy Metals

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

Absence of Halogenated Flame Retardants

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

Ortho-Phthalates Free

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

Green Guard Gold Certified

X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Crédit EQ : matériaux faibles émissions

Greenguard Gold Certified

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)

[Maintenance](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.


Available Colorways

 <div>Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation</div>	 <div>Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation</div>	 <div>Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation</div>	 <div>Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation</div>	 <div>Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation</div>	 <div>Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation</div>
 <div>Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation</div>	 <div>New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation</div>	 <div>Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation</div>	 <div>Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation</div>	 <div>Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation</div>	 <div>Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation</div>
 <div>Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation</div>	 <div>Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation</div>	 <div>Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation</div>			

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1




Uniform Appearance

V2




Slight Variation

V3



Moderate Variation

V4



Substantial Variation