

Pivot

| | | |
|-----------------------|---|--|
| Stijlnummer | 4499V | |
| Producttype | Heavy Commercial Pvc-Free Ecoworx™ Resilient | |
| Collectie | Art + Science | |
| Uitzicht | Stijlnaam | Gegevens + Prestatie |
| Type of Floorcovering | EN 1307 | EcoWorx resilient |
| Classificatie | ISO 10874 | class 34 very heavy commercial use |
| Totale Massa | EN ISO 23997 | 3.49 kg/m² |
| Totale Dikte | EN ISO 24346 | 2.5 mm |
| Afmetingen | EN 994 | 21.01 cm x 129.01 cm 16 tiles (4.33 sq m) per box |
| Gewicht Per Doos | | 16.52 kg |




Prestatie

| | | |
|--------------------------|--------------------------|---|
| Ontvlambaarheid | EN 13501-1 | Bfl-S1 |
| Warmteweerstand m² K/w | ISO 8302 | 0.013 m² K/W |
| Slipweerstand | BS 7976-2 | Woodgrain Emboss: PTV Dry 58 PTV Wet 52 (pendulum) |
| | DIN 51130 | R10 |
| Dimensionale Stabiliteit | EN ISO 23999 | ≤0.15% |
| Stoel Met Wieltjes | EN 425, ISO 4918 | no damage |
| Contactgeluidreductie | BS EN ISO 10140 | ΔLw 9dB/20dB with 2mm underlay |
| Kleurvastheid Voor Licht | BS EN ISO 105-BO2 | 8 |

15 Year Commercial Limited System Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.


Aanbevolen Installatiemethode

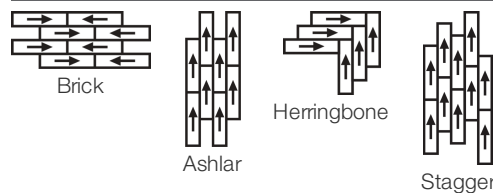


Coördinerende Producten

PVC-Free: Observe

colour and visual variation index

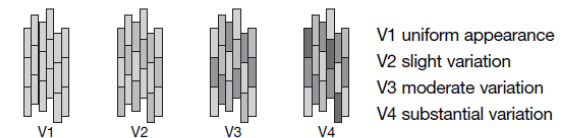

Colour and visual variation is inherent in all modular products. Prior to installation, we recommend reviewing multiple tiles on V3 and V4 colours.



ΔLw 9dB/20dB with 2mm underlay

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

Kenmerken + Certificeringen

Greenhealth Approved

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Verklaar

Environmental Guarantee

Greenguard Gold

Total Recycled Content

land van herkomst

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Reductie gevaarlijke stoffen Deel 1: Beperking Optimalisatie Gevaarlijke Materialen - 1 pt

X10 Reductie van vluchtige stoffen Deel 1 (A): Beheer Vluchtige Organische Stoffen (VOS) Optimalisatie - 1 pt

Deel 2: Beheer van halfvluchtige organische stoffen (SVOC) Optimalisatie - 1 pt

X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt

X14 Transparantie van materialen Deel 1: Optimalisatie: Bevorderen van ingrediëntenopenbaarmaking - max 2 punten

Groen Leed Bijdragekrediet

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"

"EQ-krediet: materialen met lage emissie Optie 1: Berekeningen per productcategorie"

Aanvullende Informatie

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation](#)[Maintenance](#)[Yes](#)[1000 ppm Disclosure](#)[3rd Party Certified in Accordance with ISO 14025, EN 15804, And ISO 21930](#)5.2 Kg Co₂/M²

Carbon Neutral

[Voldoet Aan LBC](#)[Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer.](#)

Gecertificeerd

25% (Pre-Consumer 0% | Post-Consumer 25%)

Duitsland

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates Free****Green Guard Gold Certified****Health Product Declaration (HPD) | 1000 Ppm Disclosure****Health Product Declaration (HPD) | 1000 Ppm Disclosure****Greenguard Gold Certified**Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Lichtreflectiewaarde

| | | | | | |
|--|---|--|--|--|--|
|  <div>Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation</div> |  <div>Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation</div> |  <div>Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation</div> |  <div>Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation</div> |  <div>Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation</div> |  <div>Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation</div> |
|  <div>Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation</div> |  <div>New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation</div> |  <div>Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation</div> |  <div>Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation</div> |  <div>Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation</div> |  <div>Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation</div> |
|  <div>Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation</div> |  <div>Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation</div> |  <div>Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation</div> | | | |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

