

Pivot


Coleção	Art + Science	
Número Do Produto	4499V	
Construção	Heavy Commercial Pvc-Free Ecoworx™ Resilient	
classe		
Acabamento	ExoGuard+®	
	U.s.	Metric
Dimensões Nominais	8 in w x 51 in l	21 cm w x 129 cm l
Dimensões Reais	8.27 in w x 50.79 in l	21.01 cm w x 129.01 cm l
Espessura Total Do Produto	0.098 in	2.5 mm
Perfil De Borda	Micro-Chanfrado	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	4200 Resilient 1 Gallon or 4200 Resilient 4 Gallon	

Empacotamento

Peças Por Caixa	16 pcs	
Área Por Caixa	46.65 sq ft	4.33 sq m
Peso Por Caixa	36.431 lbs	16.52 kg



Método De Instalação Recomendado

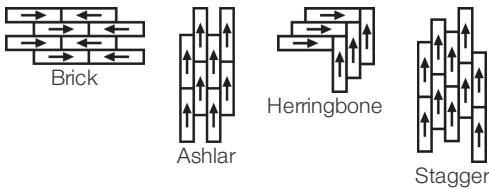

Produtos Coordenados

PVC-Free: Observe, Experiment

desempenho + teste

resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

- [1 Year Commercial Limited Warranty](#)
- [25 Year Commercial System Warranty](#)

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved Yes Health Product Declaration (HPD) 1000 ppm Disclosure Declare Compatível LBC
Climate Impact	
Environmental Product Declaration (EPD)	in Accordance with ISO 14025:2006 And EN 15804:2012+a2:2019/Ac:2021
Embodied Carbon (Cradle to Gate)	5.2 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	25% (Pre-Consumer 0% Post-Consumer 25%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Resilient Within The United States And Canada At No Cost to The Customer. Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	Absence of Halogenated Flame Retardants
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	Ortho-Phthalates Free
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	Green Guard Gold Certified
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	Health Product Declaration (HPD) 1000 Ppm Disclosure

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção Ingredientes materiais - Opção 1: Relatório de ingredientes materiais	Health Product Declaration (HPD) 1000 Ppm Disclosure
---	---

Informação Adicional

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability . **Meets or exceeds all local and national regulations in country of manufacture. Installation Maintenance	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice. This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. *****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs. Visit shawcontract.com/testing for more information.
--	--

Available Colorways

 <div>Reform 00111 LRV 33.0 L* 64.13 V3 - Moderate Variation</div>	 <div>Mindset 00115 LRV 41.4 L* 70.46 V2 - Slight Variation</div>	 <div>Reclaim 00121 LRV 29.5 L* 61.24 V2 - Slight Variation</div>	 <div>Climate 00125 LRV 25.4 L* 57.42 V2 - Slight Variation</div>	 <div>Reuse 00140 LRV 38.5 L* 68.38 V2 - Slight Variation</div>	 <div>Value 00144 LRV 41.8 L* 70.76 V3 - Moderate Variation</div>
 <div>Renew 00155 LRV 23.6 L* 55.70 V3 - Moderate Variation</div>	 <div>New Growth 00240 LRV 27.1 L* 59.07 V2 - Slight Variation</div>	 <div>Change 00504 LRV 43.7 L* 72.03 V4 - Substantial Variation</div>	 <div>Resilience 00570 LRV 13.1 L* 42.95 V3 - Moderate Variation</div>	 <div>Process 00575 LRV 16.4 L* 47.45 V2 - Slight Variation</div>	 <div>Native 00720 LRV 21.8 L* 53.81 V2 - Slight Variation</div>
 <div>Ecology 00730 LRV 20.2 L* 52.05 V2 - Slight Variation</div>	 <div>Earthen 00740 LRV 14.1 L* 44.39 V3 - Moderate Variation</div>	 <div>Future 00750 LRV 15.3 L* 45.98 V2 - Slight Variation</div>			

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

