


Branching Out 5.0 Mm

Collection	Branching Out	
Numéro De Style	4480V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd Avec Fibre De Verre	
classe	ExoGuard®	
Finition	Impérial	Métrique
Dimensions Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensions Réelles	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Spray, , 4200 Resilient Tile 1 Gallon, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gal	

Emballage

Pièces Par Carton	10 pcs	
Surface Par Carton	20 sq ft	1.86 sq m
Poids Par Carton	35.1 lbs	15.92 kg

Méthodes d'Installation Conseillées

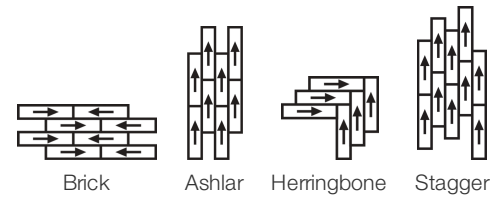

Coordination Des Produits

LVT: Branching Out 5mm Acoustic  
COREtec: Branching Out Coretec 12 Mil, Branching Out Coretec 20 Mil

Performance + Tests Et Essai

Résistance À La Chaleur (Astm F1514)	Passes
Résistance À La Lumière (Astm F1515)	Passes
Essai Au Panneau Radiant (Astm E648)	Passes, Class I
Coefficient De Frottement (Astm D2407, Résistance Au Glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Garanties

[Limitée Commerciale De 15 Ans](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing	
Indoor Air Quality	FloorScore®   Agréé
Climate Impact	
Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017
Embodied Carbon (Cradle to Gate)	7.31 Kg Co <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	25% (Pre-Consumer 25%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt	<b>Absence of Heavy Metals</b>
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt	<b>Ortho-Phthalates</b>
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt	<b>FloorScore Certificate</b>
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
Crédit EQ : matériaux faibles émissions	<b>FloorScore Certified</b>
<a href="#">Installation Guidelines</a>	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
<a href="#">Maintenance Guidelines</a>	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

Available Colorways



Alpine Oak 56100  
V3 - Moderate Variation



Zion Oak 56103  
V2 - Slight Variation



Rise Oak 56120  
V3 - Moderate Variation



Riverside Oak 56140  
V2 - Slight Variation



Prairie Oak 56240  
V3 - Moderate Variation



Plains Oak 56250  
V3 - Moderate Variation



Ridgeline Oak 56504  
V3 - Moderate Variation



Range Oak 56506  
V2 - Slight Variation



Smoky Oak 56516  
V3 - Moderate Variation



Forest Walnut 56703  
V2 - Slight Variation



Pinecone Oak 56720  
V3 - Moderate Variation



Ravine Oak 56730  
V2 - Slight Variation



Traverse Oak 56760  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

