


Branching Out 5.0 Mm

Coleção	Branching Out	
Número Do Produto	4480V	
Construção	Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	6 in w x 48 in l	15 cm w x 122 cm l
Dimensões Reais	6.00 in w x 48.00 in l	15.24 cm w x 121.92 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Dry Back	
Instalação	Direct Glue	
Adesivo Recomendado	S150-95 Resilient Spray, , 4200 Resilient Tile 1 Gallon, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gal	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	20 sq ft	1.86 sq m
Peso Por Caixa	35.1 lbs	15.92 kg

Método De Instalação Recomendado

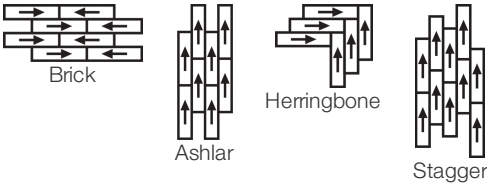

Produtos Coordenados

LVT: Branching Out 5mm Acoustic  
COREtec: Branching Out Coretec 12 Mil, Branching Out Coretec 20 Mil

desempenho + teste

resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificações

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	11.59 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	Country of Origin   Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	<b>Absence of Asbestos</b>
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	<b>Absence of Heavy Metals</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	<b>Absence of Halogenated Flame Retardants</b>
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	<b>Ortho-Phthalates</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	<b>FloorScore Certificate</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção Ingredientes materiais - Opção 1: Relatório de ingredientes materiais	<b>Health Product Declaration (HPD)   1000 Ppm Disclosure</b>
MR Credit: Divulgação e otimização de produtos de construção Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
Crédito de EQ: Materiais de baixa emissão Opção 1: cálculos de categoria de produto	<b>FloorScore® Certified</b>

[Installation Guidelines](#)  
[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways




Alpine Oak 56100  
V3 - Moderate Variation




Zion Oak 56103  
V2 - Slight Variation




Rise Oak 56120  
V3 - Moderate Variation




Riverside Oak 56140  
V2 - Slight Variation




Prairie Oak 56240  
V3 - Moderate Variation




Plains Oak 56250  
V3 - Moderate Variation




Ridgeline Oak 56504  
V3 - Moderate Variation




Range Oak 56506  
V2 - Slight Variation




Smoky Oak 56516  
V3 - Moderate Variation




Forest Walnut 56703  
V2 - Slight Variation



Pinecone Oak 56720  
V3 - Moderate Variation



Ravine Oak 56730  
V2 - Slight Variation



Traverse Oak 56760  
V3 - Moderate Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

