

Terrain II 12 Mil 2.0


Collection	Terrain II	
Style Number	4604V	
Construction	Light Commercial Luxury Vinyl Plank	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Wear Layer Thickness	12 mil (0.012 in)	0.3 mm
Overall Thickness	0.079 in	2 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Approved Spaces	Light Commercial	
Recommended Adhesive	S150 Resilient Tile Spray, 4200 Resilient Tile 1 Gallon, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Packaging

Pieces per Carton	27 pcs	
Area per Carton	53.64 sq ft	4.98 sq m
Weight per Carton	36.44 lbs	16.53 kg

Recommended Installation Method

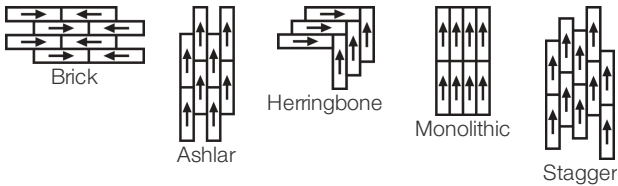

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm  
Rigid Core: Terrain II Rigid Core

Performance + Testing

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662, Flaming Mode)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

[7 Year Light Commercial Limited Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	9.59 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	30% (Pre-Consumer 30%   Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

GSA | Approved

CE Marking (EN 14041) | 3rd Party Certified

Country of Origin | United States

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD)   100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](#).

[Installation Guidelines](#)

[Maintenance Guidelines](#)




Please visit [www.shawcontract.com](#) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](#) for more information.

### Available Colorways

					
Satinwood 00140 V3 - Moderate Variation	Willow 00170 V4 - Substantial Variation	Thatch 00173 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210 V3 - Moderate Variation	Prime 00240 V3 - Moderate Variation
					
Trail 00256 V2 - Slight Variation	Poplar 00515 V3 - Moderate Variation	Shade 00564 V2 - Slight Variation	Root 00568 V4 - Substantial Variation	Timber 00572 V2 - Slight Variation	Taun 00660 V3 - Moderate Variation
					
Pirch 00684 V2 - Slight Variation	Lodge 00740 V2 - Slight Variation	Elm 00761 V3 - Moderate Variation	Grove 00769 V3 - Moderate Variation	Nest 00774 V2 - Slight Variation	Echo 00775 V2 - Slight Variation
					
Summit 05012 V3 - Moderate Variation	Orchard 05013 V2 - Slight Variation	Lark 05016 V3 - Moderate Variation	Aspen 05019 V4 - Substantial Variation	Sequoia 07003 V3 - Moderate Variation	Sumac 07004 V3 - Moderate Variation
					
Alder 07005 V3 - Moderate Variation	Thicket 07008 V2 - Slight Variation				

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

