

Terrain II 12 Mil 2.0


Collection	Terrain II	
Numéro De Style	4604V	
Construction	Planche De Vinyle De Luxe Commerciale Légère	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensions Réelles	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	12 mil (0.012 in)	0.3 mm
Épaisseur Générale Du Produit	0.079 in	2 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Approved Spaces	Light Commercial	
Adhésif Recommandé	S150 Resilient Tile Spray, 4200 Resilient Tile 1 Gallon, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	27 pcs	
Surface Par Carton	53.64 sq ft	4.98 sq m
Poids Par Carton	36.44 lbs	16.53 kg

Méthodes d'Installation Conseillées

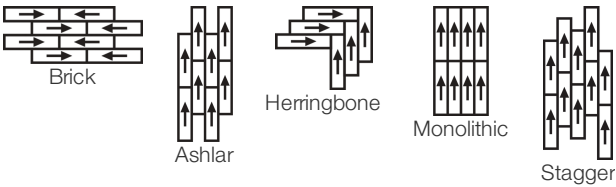

Coordination Des Produits

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 30 Mil, Terrain II 20 Mil 5 Mm  
Rigid Core: Terrain II Rigid Core

## performance + Tests et essai

résistance à la chaleur (ASTM F1514)	<b>Passes</b>
résistance à la lumière (ASTM F1515)	<b>Passes</b>
résistance chimique (ASTM F925)	<b>Passes</b>
densité de fumée (ASTM E662, mode flamme)	<b>Passes</b>
Essai au panneau radiant (Astm E648)	<b>Passes, Class I</b>
coefficient de frottement (ASTM D2407, résistance au glissement)	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garanties

[7 Year Light Commercial Limited Warranty](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Attributs + Certifications

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Agréé](#)

## Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)  
9.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
30% (Pre-Consumer 30% | Post-Consumer 0%)

## Global Product Assessment

[Environmental Guarantee\\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.](#)  
CE Marking (EN 14041) | [Certifié Par Un Tiers](#)  
Country of Origin | United States

## Contribution Au Certificat Vert Leed

« Crédit MR : Divulcation et optimisation des produits de construction  
« Crédit MR : Divulcation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore Certified**

## Informations Supplémentaires

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

### Available Colorways

					
Satinwood 00140 V3 - Moderate Variation	Willow 00170 V4 - Substantial Variation	Thatch 00173 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210 V3 - Moderate Variation	Prime 00240 V3 - Moderate Variation
					
Trail 00256 V2 - Slight Variation	Poplar 00515 V3 - Moderate Variation	Shade 00564 V2 - Slight Variation	Root 00568 V4 - Substantial Variation	Timber 00572 V2 - Slight Variation	Taun 00660 V3 - Moderate Variation
					
Pirch 00684 V2 - Slight Variation	Lodge 00740 V2 - Slight Variation	Elm 00761 V3 - Moderate Variation	Grove 00769 V3 - Moderate Variation	Nest 00774 V2 - Slight Variation	Echo 00775 V2 - Slight Variation
					
Summit 05012 V3 - Moderate Variation	Orchard 05013 V2 - Slight Variation	Lark 05016 V3 - Moderate Variation	Aspen 05019 V4 - Substantial Variation	Sequoia 07003 V3 - Moderate Variation	Sumac 07004 V3 - Moderate Variation
					
Alder 07005 V3 - Moderate Variation	Thicket 07008 V2 - Slight Variation				

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

