

Prosper Classicbac®

|                                   |                                 |                  |
|-----------------------------------|---------------------------------|------------------|
| Tipo De Produto                   | Broadloom                       |                  |
| Coleção                           | Abundant Life II                |                  |
| Número Do Produto                 | 60730                           |                  |
| Construção                        | Padrão Multinível Bouclé        |                  |
| Fibra                             | Ecosolution Q® Nylon            |                  |
| Método De Tingimento              | 100% Solution Dyed              |                  |
| Base Primária                     | Sintético                       |                  |
| Base Secundária                   | Classicbac®                     |                  |
| Tratamentos De Proteção           | SSP® Shaw Proteção Anti-Manchas |                  |
| Adesivo Recomendado               | H1000, H1200 or H3800           |                  |
|                                   | u.s.                            | metric           |
| Tamanho Do Produto                | 12 ft                           | 3.66 m           |
| Calibre                           | 1/10 in                         | 39.4 per 10 cm   |
| Pontos                            | 10.5 per in                     | 42.5 per 10 cm   |
| Densidade Média                   | 5169 oz/yd³                     | 0.191 g/cm³      |
| Kilotex                           |                                 | 12.91            |
| Espessura Total                   | 0.332 in                        | 8.43 mm          |
| Peso Da Fibra                     | 28 oz/yd²                       | 949.4 g/m²       |
| Repetição Do Padrão Na Instalação | .63 in x .44 in                 | 1.58 cm x 1.11cm |



Método De Instalação Recomendado

Direct Glue, Double Glue, Stretch-In

Product should be installed in residents rooms only applications. No more than two drops in width, and room lengths no greater than 25 feet is required.

When installing all carpeting, Stretch-In over pad is recommended. For hybrid locations with carpet and resilient, direct glue with LokSeam is recommended.

Dados + Teste

|                              |  |
|------------------------------|--|
| Teste De Ignição (Pill)      | Pass   |
| Painel Radiante (Astrm E648) | Class I  |
| Nbs Fumaça                   | Less Than 450  |
| Cri Green Label Plus (Bpl)   | GLP8472  |
| Ada Compliance               | ≥0.6, Atende as recomendações do coeficiente de fricção estático para as superfícies caminháveis ADA e rotas acessíveis*** |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Produtos Coordenados

Broadloom: **Accomplish Classicbac®, Aspire Classicbac®**

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

**Cradle to Cradle Certified® | Nível Prata (Versão 3.1)**  
**NSF 140 | Ouro**  
**CRI Green Label Plus (GLP) | GLP8472**

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

Product Packaging

**3rd Party Certified De Acordo Com ISO14044, ISO14025 & EN15804**  
**<1% (Pre-Consumer <1% | Post-Consumer 0%)**  
**100% Reciclável**

Global Product Assessment

**CE Marking (EN 14041) | Certificado 3rd Party**  
**Environmental Guarantee\* | Re[turn] Reclamation Program\* | Pickup & Delivery Available**  
**Country of Origin\*\* | Imported**

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)


MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes do material - Opção 2: Otimização do ingrediente do material

Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

**3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804**  
  
**C2C Silver Level (Version 3.1)**  
  
**C2C Silver Level (Version 3.1)**  
  
**Green Label Plus Certification: GLP8472**

Available Colorways

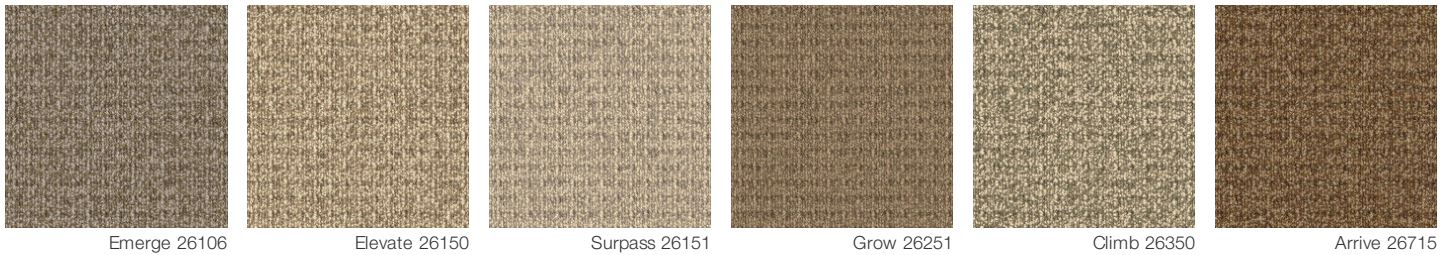

Informação Adicional

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](https://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture. (Manufactured in an ISO 9001 & ISO 14001 certified facility or equivalent)

\*\*\*This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

