


Plasterwork 6 X 12 Covebase PRODUCT SPECIFICATIONS

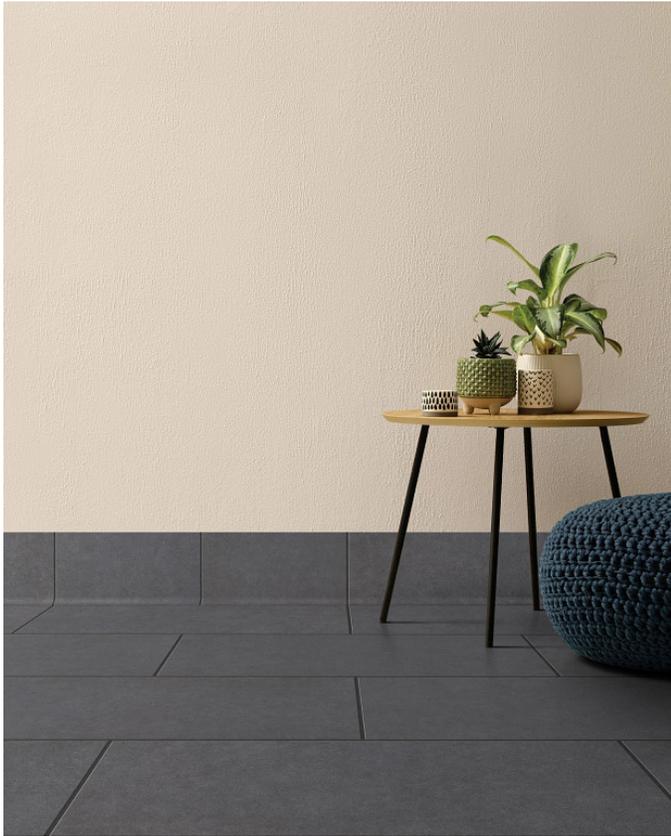

STYLE NUMBER	P347V
COMPOSITION	Porcelain
TILE TYPE	Trim
BODY TYPE	Glazed Porcelain
OVERALL THICKNESS	0.275" 7 mm
COUNTRY OF ORIGIN	United States
INSTALLATION AREA	Walls

Packaging

TILE SIZE	6.5" x 11.8" 16.51 cm x 29.97 cm
PIECES /BOX	10
AREA /BOX	5 sq ft 0.46 sq m

Performance Testing


BREAKING STRENGTH	≥ 250 lbs
WATER ABSORPTION %	≤ 0.50% (Impervious (Porcelain))
DCOF	≥ 0.42

Installation

[Installation Guidelines](#)
[Maintenance Guidelines](#)

Plasterwork 6 X 12 Covebase

Available Colorways

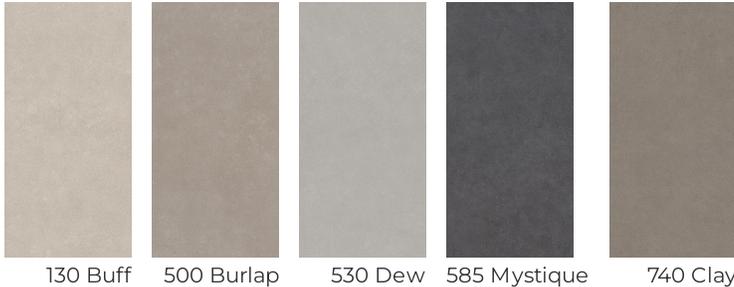

Additional Information

- A DCOF value of ≥ 0.42 is the standard for tiles specified for commercial applications as stated in standard ANSI 326.3. For more information, visit the Tile Council of North America's website: www.tcnatile.com
- Tiles with a DCOF value less than 0.42 are not recommended for use in areas with wet or slippery conditions.
- Water, oil, grease and other contaminants can create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.
- Not for use on ramps.
- Since there are variations in all fired ceramic and porcelain products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation.

Warranties

1 Year Commercial Limited

