

# TILE & STONE

## EVERMORE 8X8

glazed porcelain



915 Odile

|                                      |   |
|--------------------------------------|---|
| <b>Style Number</b>                  | <b>TG72F</b>  |
| <b>Construction</b>                  | Porcelain   |
| <b>Tile Type</b>                     | Floor   |
| <b>Finish</b>                        | Matte   |
| <b>Tile Size</b>                     | 7.84" x 7.84"   19.92 cm x 19.92 cm                                   |
| <b>Edges</b>                         | Pressed   |
| <b>Country Of Origin</b>             | Spain   |
| <b>Residential Warranty</b>          | 5 Years   |
| <b>Maintenance</b>                   | <a href="#">Maintenance Guidelines for Ceramic/Porcelain Flooring</a> |
| <b>Installation Area</b>             | Floors, Walls   |
| <b>Technical</b>                     |   |
| <b>DCOF</b>                          | * $\geq$ 0.42   |
| <b>Shade &amp; Texture Variation</b> | V1  |


A DCOF value of  $> 0.42$  is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of  $> 0.60$  referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: [www.tcnatile.com](http://www.tcnatile.com)

*\*Reference ANSI A137.1 section 6.2.2.10 Dynamic Coefficient of Friction for more information regarding product slip resistance and how site conditions and maintenance effect slip resistance.*


### MANUFACTURER'S WARNING (U):

- Tiles with DCOF AcuTest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.10.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


### Colors

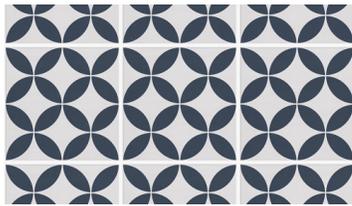

410 Sapphire

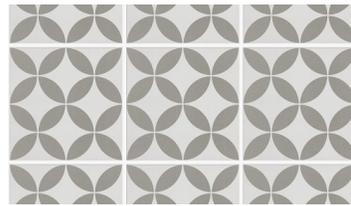

510 Armour

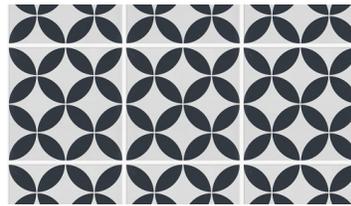

910 Odette



915 Odile



For Shaw Industries Tile/Stone installation instructions and Care/Maintenance guidelines, please contact Shaw Info Center by email at [infocenter@shawinc.com](mailto:infocenter@shawinc.com), or by phone at 800-441-7429