
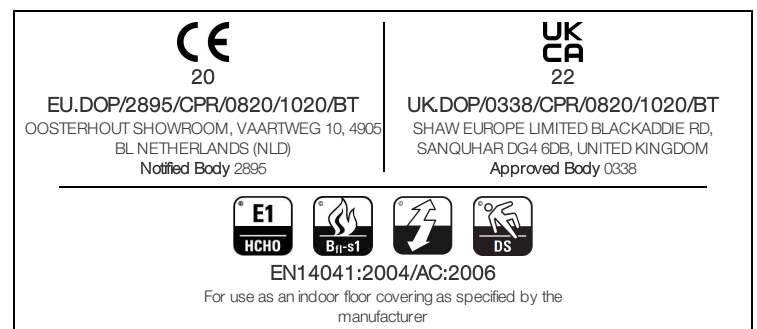


Endless Comfortworx® Tile

| Stijlnummer | C011W | |
|----------------------------------|-----------------------|---|
| Collectie | Living Systems | |
| Producttype | Tapijttegel | |
| Construction | Standard | Data + Performance |
| Type Fabricage | ISO 2424 | tufted 1/10" 39.4 per 10cm |
| Uitzicht | ISO 2424 | Multilevel-Patroonlus |
| Verfmethode | EN 994 | 100% In Oplossing Geverfd |
| Productformaat | EN 994 | 25 cm x 100 cm 20 tiles (5 m²) per box |
| Primaire Backing | ISO 2424 | Pet Nonwoven |
| Secundaire Backing | ISO 2424 | Comfortworx® Tegel Matrix Padlaag Bevat 90% Gerecycleerd Materiaal |
| Vezel | ISO 2424 | Ecosolution Q® Polyamide 6 |
| Totale Dikte | ISO 1765 | 11.9 mm |
| Afgewerkte Pooldikte | ISO 1766 | 3.0 mm |
| Totale Massa | ISO 8543 | 4346 g/m² |
| Getuft Gewicht | ISO 2424 | 746 g/m² |
| Effectieve Poolmassa | ISO 8543 | 286 g/m² |
| Pooldichtheid | ISO 8543 | 0.095 g/cm³ |
| Gegevens | | |
| Steken | ISO 1763 | 124,000/m² 31.5 per 10cm |
| Elektrostatische Weerstand | ISO 6356 | ≤ 2.0 kv (Stroll Test) |
| Gebruik Classificatie | EN 1307 | 33 Commercial Heavy |
| Luxeklasse | EN 1307 | LC1 |
| Dimensionale Stabiliteit | EN 986 | ≤ 0.2% |
| Contactgeluidsisolatie | ISO 10140 | 35db |
| Geluidsabsorptieclassificatie | ISO 354/11654 | 0.30 Aw Class D |
| Warmteweerstand m² K/w | ISO 8302 | 0.151 M² K/W Tog 1.51 |
| Weerstand Tegen Droog Uitglijden | ISO 13893 | Pass / No Pulled Loops |
| Kleurvastheid Voor Licht | ISO 105-B02 | >6 |
| Ontvlambaarheid | EN 13501-1 | Bfl-S1 (Adhered Testing) |
| Stoel Met Wieltjes | EN 985 | ≥2.4 Continuous USE |

15 Jaar Commercieel Beperkt subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Aanbevolen Installatiemethode

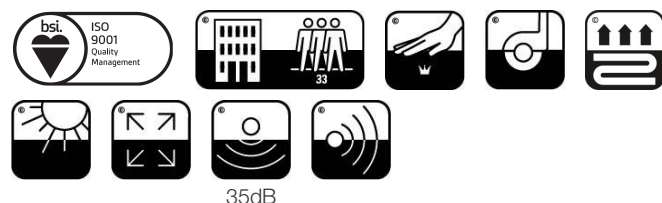

Coördinerende Producten

Carpet Tile: **Observe Colour Comfortworx® Tile, Respond Colour Comfortworx® Tile, Transform Colour Comfortworx® Tile, Source Comfortworx® Tile, Boundless Comfortworx® Tile, Respond Comfortworx® Tile, Endless Taskworx® Tile, Respond Taskworx® Tile, Observe Taskworx® Tile, Transform Taskworx® Tile, Respond Colour Taskworx® Tile, Observe Colour Taskworx® Tile, Transform Colour Taskworx® Tile, Boundless Taskworx® Tile, Source Taskworx® Tile**

Kenmerken + Certificeringen

Declaration of Performance

EU.DOP/2895/CPR/0820/1020/BT

Environmental Product Declaration (EPD)

3de Partij Gecertificeerd in Overeenstemming Met ISO 14044, ISO 14025 & EN15804

milieugarantie

Take Back Policy Offered For All Comfortworx Products

ISO 9001

Gecertificeerd

land van herkomst

Verenigd Koninkrijk

BREEAM Contribution Credit

Certificate of Approval
Schools/Offices/Health/Industrial Shed
Retail

Well V2 Contribution Credit

X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt **M1> Emissions Class For Building Material**

Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten
Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten
Materiaalingrediënten - Optie 1: Rapportage materiaalingrediënten"

HPD (Version 2.1)

Air Quality

Indoor Air Comfort Gold

Certified

M1

Certified

Memberships

WGBC Framework

WGBC Framework

UKGBC

UKGBC

Emirates Green Building Council

Emirates Green Building Council

Chemsec

Chemsec

Lichtreflectiewaarde




Optimistic 05105
LRV 24.6 | L* 56.67



Ochre 05225
LRV 22.5 | L* 54.51



Nature 05326
LRV 16.4 | L* 47.55



Lake 05327
LRV 22.2 | L* 54.26




Forests 05334
LRV 5.3 | L* 27.62




Oceans 05405
LRV 7.2 | L* 32.3




Flora 05411
LRV 16.3 | L* 47.35




Springs 05440
LRV 7.6 | L* 33.15




Skies 05486
LRV 5.1 | L* 27.04




Lava 05500
LRV 6.9 | L* 31.67




Deepest 05505
LRV 5 | L* 26.78



Radiant 05515
LRV 18.9 | L* 50.56




Wild 05557
LRV 10.5 | L* 38.64



Calm 05580
LRV 8.7 | L* 35.39




Untamed 05595
LRV 11.9 | L* 41.13



Fragile 05760
LRV 12.3 | L* 41.75



Mountain 05761
LRV 17.7 | L* 49.14



Coral 05865
LRV 9.5 | L* 37.01

Aanvullende Informatie

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
April 18, 2025

3 of 3