




Fragment Comfortworx® Tile

|   |                        |  |
|---|------------------------|--|
| Stijlnummer   | C019W                  |  |
| Collectie   | Floor Architecture III |  |
| Producttype   | Tapijttegel            |  |
| Construction  | Standard               | Data + Performance   |
| Type Fabricage  | ISO 2424               | tufted 1/12"   47.2 per 10cm   |
| Uitzicht  | ISO 2424               | Multilevel-Patroonlus  |
| Verfmethode   | EN 994                 | 100% In Oplossing Geverfd  |
| Productformaat  | EN 994                 | 50 cm x 50 cm   16 tiles (4 m²) per box                              |
| Primaire Backing  | ISO 2424               | Pet Nonwoven   |
| Secundaire Backing  | ISO 2424               | Comfortworx® Tegel   Matrix Padlaag Bevat 90% Gerecycleerd Materiaal |
| Vezel   | ISO 2424               | Ecosolution Q® Polyamide 6   |
| Totale Dikte  | ISO 1765               | 11.3 mm  |
| Afgewerkte Pooldikte  | ISO 1766               | 2.9 mm   |
| Totale Massa  | ISO 8543               | 4262 g/m²  |
| Getuft Gewicht  | ISO 2424               | 630 g/m²   |
| Effectieve Poolmassa  | ISO 8543               | 288 g/m²   |
| Pooldichtheid   | ISO 8543               | 0.097 g/cm³  |
| Gegevens  |                        |  |
| Steken  | ISO 1763               | 193,000/m²   41.0 per 10cm   |
| Elektrostatische Weerstand  | ISO 6356               | ≤ 2.0 kv (Stroll Test)   |
| Gebruik Classificatie   | EN 1307                | 33 Commercial Heavy  |
| Luxeklasse  | EN 1307                | LC1  |
| Dimensionale Stabiliteit  | EN 986                 | ≤ 0.2%   |
| Contactgeluidsisolatie  | ISO 10140              | 37db   |
| Geluidsabsorptieclassificatie   | ISO 354/11654          | 0.30 Aw   Class D  |
| Warmteweerstand m² K/w  | ISO 8302               | 0.162 M² K/W Tog 1.62  |
| Weerstand Tegen Droog Uitglijden  | ISO 13893              | Pass / No Pulled Loops   |
| Kleurvastheid Voor Licht  | ISO 105-B02            | >6   |
| Ontvlambaarheid   | EN 13501-1             | Bfl-S1 (Adhered Testing)   |
| Stoel Met Wieltjes  | EN 985                 | ≥2.4 Continuous USE  |
| 15 Jaar Commercieel Beperkt subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme. |                        |  |

Aanbevolen Installatiemethode

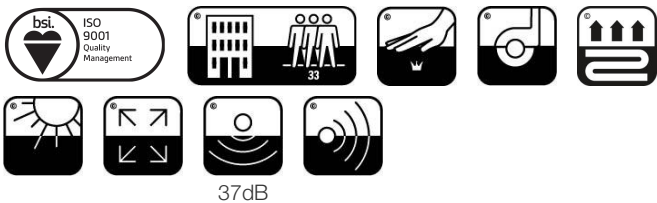




20

EU.DOP/2895/CPR/0820/1020/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895







22

UK.DOP/0338/CPR/0820/1020/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338



EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

Coördinerende Producten

Carpet Tile: **Stone Comfortworx® Tile, Formation Colours Comfortworx® Tile, Fragment Colours Comfortworx® Tile, Stone Colours Comfortworx® Tile, Formation Comfortworx® Tile, Fragment Taskworx® Tile, Stone Taskworx® Tile, Formation Colours Ecoworx S Tile, Fragment Colours Ecoworx S Tile, Formation Colours Taskworx® Tile, Fragment Colours Taskworx® Tile, Fragment Ecoworx S Tile, Stone Ecoworx S Tile, Formation Taskworx® Tile, Formation Ecoworx S Tile, Stone Colours Taskworx® Tile, Stone Colours Ecoworx® S Tile**

Kenmerken + Certificeringen

|   |   |
|---|---|
| Declaration of Performance              | EU.DOP/2895/CPR/0820/1020/BT  |
| Environmental Product Declaration (EPD) | 3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 & EN15804 |
| milieugarantie                          | Take Back Policy Offered For All Comfortworx Products                         |
| ISO 9001                                | Gecertificeerd  |
| land van herkomst                       | Verenigd Koninkrijk   |
| BREEAM Contribution Credit              | Certificate of Approval<br>Schools/Offices/Health/Industrial Shed<br>Retail   |

Well V2 Contribution Credit

|  |   |
|--|---|
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization | M1> Emissions Class For Building Material |
|--|---|

Groen Leed Bijdragekrediet

|  |   |
|--|---|
| "MR-krediet: openbaarmaking en optimalisering van bouwproducten<br>Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)" | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804 |
| "MR-krediet: Openbaarmaking en optimalisering van bouwproducten<br>MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"  | HPD ( Version 2.1 )   |










Air Quality

|                         |           |
|-------------------------|-----------|
| Indoor Air Comfort Gold | Certified |
| M1                      | Certified |

Memberships

|                                 |                                 |
|---------------------------------|---------------------------------|
| WGBC Framework                  | WGBC Framework                  |
| UKGBC                           | UKGBC                           |
| Emirates Green Building Council | Emirates Green Building Council |
| Chemsec                         | Chemsec                         |

Lichtreflectiewaarde

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Marble 53100<br>LRV 25.9   L* 57.97  | Azurite 53485<br>LRV 3.1   L* 20.53   | Granite 53500<br>LRV 3.3   L* 21.3  | Mica 53518<br>LRV 10.2   L* 38.26  | Mortar 53530<br>LRV 11.5   L* 40.44   | Limestone 53535<br>LRV 13.2   L* 43.01  |
|  |  |  |  |   |   |
| Anthracite 53555<br>LRV 5.8   L* 29.94   | Chromite 53580<br>LRV 10.3   L* 38.38   | Mix 53597<br>LRV 7   L* 31.88   |  |   |   |

Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302