



Stone Comfortworx® Tile

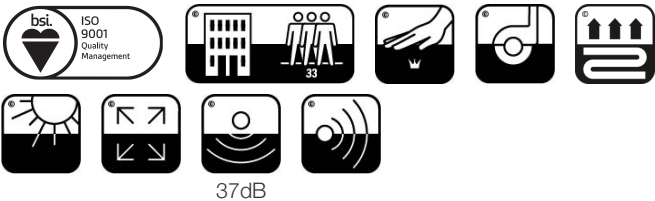

Numéro Du Style	C018W	
Collection	Floor Architecture III	
Type De Produit	Dalles De Moquette	
Construction	Standard	Data + Performance
Type De Fabrication	ISO 2424	tufted 1/10"   39.4 per 10cm
Construction	ISO 2424	Tufté Structuré Bouclé à Motif
Méthode De Coloration	EN 994	100% Solution Teinte
Dimensions Du Produit	EN 994	50 cm x 50 cm   16 tiles (4 m²) per box
Sous-couche Primaire	ISO 2424	Pet Non-Woven
Sous-couche Secondaire	ISO 2424	Comfortworx® Tile   La Couche Matrix Pad Contient 90 % De Contenu Recyclé
Fibre	ISO 2424	Ecosolution Q® Polyamide 6
Epaisseur Du Velours	ISO 1765	11.5 mm
Épaisseur Du Velours Fini	ISO 1766	3.0 mm
Poids Total	ISO 8543	4240 g/m²
Poids Tufté	ISO 2424	630 g/m²
Poids Du Velours Utile	ISO 8543	323 g/m²
Densité Du Velours	ISO 8543	0.107 g/cm³
Contenu Recyclé Total		57% (pre-consumer 45%   post-consumer 12%)

Données

Points	ISO 1763	165,000/m²   42.0 per 10cm
Propension Électrostatique	ISO 6356	≤ 2.0 kv (Stroll Test)
Classification d'Utilisation	EN 1307	33 Commercial Heavy
Classification Luxe	EN 1307	LC1
Stabilité Dimensionnelle	EN 986	≤ 0.2%
Isolation Acoustique	ISO 10140	37db
Classification d'Absorption Sonore	ISO 354/11654	0.30 Aw   Class D
Résistance Thermique m² K/w	ISO 8302	0.163 M² K/W Tog 1.63
Dry Slip Resistance	ISO 13893	Pass / No Pulled Loops
Résistance De La Couleur À La Lumière	ISO 105-B02	>6
Inflammabilité	EN 13501-1	Bfl-S1 (Adhered Testing)
Chaise À Roulette	EN 985	≥2.4 Continuous USE

Limitée Commerciale De 15 Ans subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Méthodes d'Installation Conseillées



20

EU.DOP/2895/CPR/0820/1020/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/0820/1020/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

## Coordination Des Produits

Carpet Tile: **Fragment Comfortworx® Tile, Formation Colours Comfortworx® Tile, Fragment Colours Comfortworx® Tile, Stone Colours Comfortworx® Tile, Formation Comfortworx® Tile, Fragment Taskworx® Tile, Stone Taskworx® Tile, Formation Colours Ecoworx S® Tile, Fragment Colours Ecoworx S® Tile, Formation Colours Taskworx® Tile, Fragment Colours Taskworx® Tile, Fragment Ecoworx S® Tile, Stone Ecoworx S® Tile, Formation Taskworx® Tile, Formation Ecoworx S® Tile, Stone Colours Taskworx® Tile, Stone Colours Ecoworx S® Tile**

## Attributs + Certifications

Declaration of Performance

Déclaration environnementale de produit (EPD)

garantie environnementale

ISO 9001

pays d'origine

BREEAM Contribution Credit

EU.DOP/2895/CPR/0820/1020/BT

**Certifié Par Un Organisme Tiers Conformément Aux Normes  
ISO14044, ISO 14025 & EN15804**

Take Back Policy Offered For All Comfortworx Products

**Certifié****United Kingdom**

**Certificate of Approval  
Schools/Offices/Health/Industrial Shed  
Retail**

## Well V2 Contribution Credit

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des  
revêtements de sol – 1 pt

**M1> Emissions Class For Building Material**

## Contribution À La Certification Leed

MR Credit: Building Product Disclosure and Optimisation  
Environmental Product Declarations - Option 1: Environmental Product  
Declaration (EPD)

**3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804**

MR Credit: Building Product Disclosure and Optimisation  
Material Ingredients - Option 1: Material Ingredient Reporting

**HPD ( Version 2.1 )**

"Crédit EQ : matériaux faibles émissions  
Option 1 : calculs par catégorie de produit"

**Certified**

## Air Quality

Indoor Air Comfort Gold

**Certified**

M1

**Certified**

## Memberships

WGBC Framework

**WGBC Framework**

UKGBC

**UKGBC**







Emirates Green Building Council

**Emirates Green Building Council**

Chemsec

**Chemsec**

Indice De Réflexion Lumineuse

					
Granite 53500 LRV 4.3   L* 24.5	Mica 53518 LRV 11.5   L* 40.44	Limestone 53535 LRV 15.4   L* 46.16	Anthracite 53555 LRV 7.2   L* 32.31	Chromite 53580 LRV 10.3   L* 38.44	Mix 53597 LRV 7.5   L* 32.89

Informations Supplémentaires

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

Limitée commerciale de 15 ans

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

