



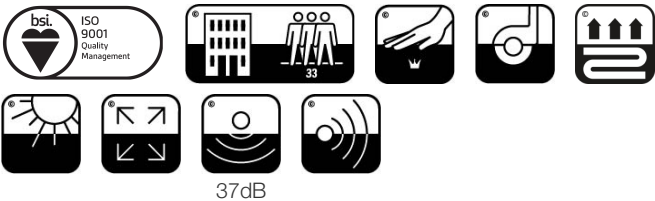

Stone Comfortworx® Tile

|                             |                        |  |
|-----------------------------|------------------------|--|
| Stijlnummer                 | C018W                  |  |
| Collectie                   | Floor Architecture III |  |
| Producttype                 | Tapijttegel            |  |
| Construction                | Standard               | Data + Performance   |
| Type Fabricage              | ISO 2424               | tufted 1/10"   39.4 per 10cm   |
| Uitzicht                    | ISO 2424               | Multilevel-Patroonlus  |
| Verfmethode                 | EN 994                 | 100% In Oplossing Geverfd  |
| Productformaat              | EN 994                 | 50 cm x 50 cm   16 tiles (4 m²) per box                              |
| Primaire Backing            | ISO 2424               | Pet Nonwoven   |
| Secundaire Backing          | ISO 2424               | Comfortworx® Tegel   Matrix Padlaag Bevat 90% Gerecycleerd Materiaal |
| Vezel                       | ISO 2424               | Ecosolution Q® Polyamide 6   |
| Totale Dikte                | ISO 1765               | 11.5 mm  |
| Afgewerkte Pooldikte        | ISO 1766               | 3.0 mm   |
| Totale Massa                | ISO 8543               | 4240 g/m²  |
| Getuft Gewicht              | ISO 2424               | 630 g/m²   |
| Effectieve Poolmassa        | ISO 8543               | 323 g/m²   |
| Pooldichtheid               | ISO 8543               | 0.107 g/cm³  |
| Totaal Gerecycleerde Inhoud |                        | 57% (pre-consumer 45%   post-consumer 12%)                           |
| Gegevens                    |                        |  |

|                                  |               |                            |
|----------------------------------|---------------|----------------------------|
| Steken                           | ISO 1763      | 165,000/m²   42.0 per 10cm |
| Elektrostatische Weerstand       | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Gebruik Classificatie            | EN 1307       | 33 Commercial Heavy        |
| Luxeklasse                       | EN 1307       | LC1                        |
| Dimensionale Stabiliteit         | EN 986        | ≤ 0.2%                     |
| Contactgeluidsisolatie           | ISO 10140     | 37db                       |
| Geluidsabsorptieclassificatie    | ISO 354/11654 | 0.30 Aw   Class D          |
| Warmteweerstand m² K/w           | ISO 8302      | 0.163 M² K/W Tog 1.63      |
| Weerstand Tegen Droog Uitglijden | ISO 13893     | Pass / No Pulled Loops     |
| Kleurvastheid Voor Licht         | ISO 105-B02   | >6                         |
| Ontvlambaarheid                  | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Stoel Met Wieltjes               | EN 985        | ≥2.4 Continuous USE        |

15 Jaar Commercieel Beperkt subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Aanbevolen Installatiemethode



20

EU.DOP/2895/CPR/0820/1020/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905  
BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/0820/1020/BT

SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

## Coördinerende Producten

Carpet Tile: **Fragment Comfortworx® Tile, Formation Colours Comfortworx® Tile, Fragment Colours Comfortworx® Tile, Stone Colours Comfortworx® Tile, Formation Comfortworx® Tile, Fragment Taskworx® Tile, Stone Taskworx® Tile, Formation Colours Ecoworx S® Tile, Fragment Colours Ecoworx S® Tile, Formation Colours Taskworx® Tile, Fragment Colours Taskworx® Tile, Fragment Ecoworx S® Tile, Stone Ecoworx S® Tile, Formation Taskworx® Tile, Formation Ecoworx S® Tile, Stone Colours Taskworx® Tile, Stone Colours Ecoworx S® Tile**

## Kenmerken + Certificeringen

Declaration of Performance

Environmental Product Declaration (EPD)

milieugarantie

ISO 9001

land van herkomst

BREEAM Contribution Credit

EU.DOP/2895/CPR/0820/1020/BT

**3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 & EN15804**

Take Back Policy Offered For All Comfortworx Products

Gecertificeerd

Verenigd Koninkrijk

Certificate of Approval

Schools/Offices/Health/Industrial Shed

Retail

## Well V2 Contribution Credit

X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt **M1> Emissions Class For Building Material**

## Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten  
Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten  
MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"

3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804

HPD ( Version 2.1 )

## Air Quality

Indoor Air Comfort Gold

M1

Certified

Certified

## Memberships

WGBC Framework

UKGBC

Emirates Green Building Council

Chemsec







WGBC Framework

UKGBC

Emirates Green Building Council

Chemsec

Lichtreflectiewaarde

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Granite 53500<br>LRV 4.3   L* 24.5   | Mica 53518<br>LRV 11.5   L* 40.44   | Limestone 53535<br>LRV 15.4   L* 46.16  | Anthracite 53555<br>LRV 7.2   L* 32.31   | Chromite 53580<br>LRV 10.3   L* 38.44   | Mix 53597<br>LRV 7.5   L* 32.89   |

Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

15 jaar commercieel beperkt

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

