

## Familiar Comfortworx® Tile

Stijlnummer	<b>C006W</b>	
Collectie	<b>Haven</b>	
Producttype	<b>Tapijttegel</b>	
Construction	Standard	Data + Performance
Type Fabricage	<b>ISO 2424</b>	<b>tufted 1/10"   39.4 per 10cm</b>
Uitzicht	<b>ISO 2424</b>	<b>Multilevel-Patroonlus</b>
Verfmethode	<b>EN 994</b>	<b>100% In Oplossing Geverfd</b>
Productformaat	<b>EN 994</b>	<b>25 cm x 100 cm   12 tiles (3 m²) per box</b>
Primaire Backing	<b>ISO 2424</b>	<b>Pet Nonwoven</b>
Secundaire Backing	<b>ISO 2424</b>	<b>Comfortworx® Tegel   Matrix Padlaag Bevat 90% Gerecycleerd Materiaal</b>
Vezel	<b>ISO 2424</b>	<b>Ecosolution Q® Polyamide 6</b>
Totale Dikte	<b>ISO 1765</b>	<b>12.3 mm</b>
Afgewerkte Pooldikte	<b>ISO 1766</b>	<b>3.5 mm</b>
Totale Massa	<b>ISO 8543</b>	<b>4404 g/m²</b>
Getuft Gewicht	<b>ISO 2424</b>	<b>949 g/m²</b>
Effectieve Poolmassa	<b>ISO 8543</b>	<b>394 g/m²</b>
Pooldichtheid	<b>ISO 8543</b>	<b>0.113 g/cm³</b>
Totaal Gerecycleerde Inhoud		<b>53% (pre-consumer 42%   post-consumer 11%)</b>





### Gegevens

Steken	<b>ISO 1763</b>	<b>129,000/m²   32.8 per 10cm</b>
Elektrostatische Weerstand	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Gebruik Classificatie	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxeklasse	<b>EN 1307</b>	<b>LC1</b>
Dimensionale Stabiliteit	<b>EN 986</b>	<b>≤ 0.2%</b>
Contactgeluidsisolatie	<b>ISO 10140</b>	<b>36db</b>
Geluidsabsorptieclassificatie	<b>ISO 354/11654</b>	<b>0.35 Aw   Class D</b>
Warmteweerstand m² K/w	<b>ISO 8302</b>	<b>0.166 M² K/W Tog 0.46</b>
Weerstand Tegen Droog Uitglijden	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Kleurvastheid Voor Licht	<b>ISO 105-B02</b>	<b>&gt;6</b>
Ontvlambaarheid	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Stoel Met Wieltjes	<b>EN 985</b>	<b>≥2.4 Continuous USE</b>

**15 Jaar Commercieel Beperkt** subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

### Aanbevolen Installatiemethode

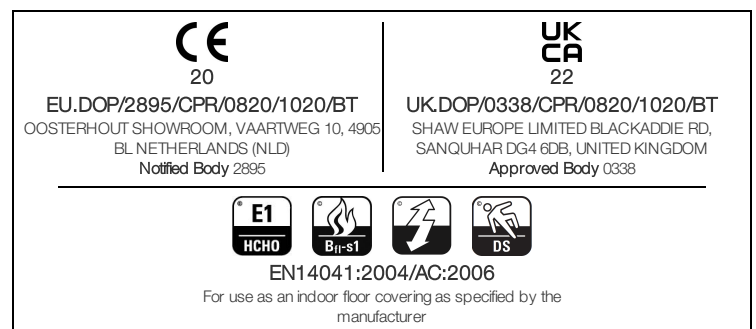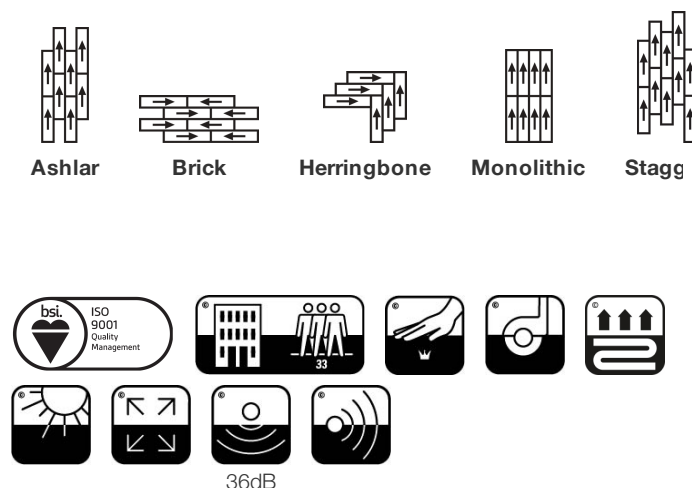

## Coördinerende Producten

Carpet Tile: **Honest Comfortworx® Tile, Identity Comfortworx® Tile, Honest Taskworx® Tile, Identity Taskworx® Tile, Familiar Taskworx® Tile**

## Kenmerken + Certificeringen

Declaration of Performance

**EU.DOP/2895/CPR/0820/1020/BT**

Environmental Product Declaration (EPD)

**3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 & EN15804**

milieugarantie

**Take Back Policy Offered For All Comfortworx Products**

ISO 9001

**Gecertificeerd**

land van herkomst

**Verenigd Koninkrijk**

BREEAM Contribution Credit

**Certificate of Approval  
Schools/Offices/Health/Industrial Shed  
Retail**

## Well V2 Contribution Credit

X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt

**M1> Emissions Class For Building Material**

## Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten  
Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

**3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804**

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten  
Materiaal ingrediënten - Optie 1: Rapportage materiaal ingrediënten"

**HPD ( Version 2.1 )**

## Air Quality

Indoor Air Comfort Gold

**Certified**

M1

**Certified**

## Memberships

WGBC Framework

**WGBC Framework**

UKGBC

**UKGBC**


Emirates Green Building Council

**Emirates Green Building Council**


Chemsec

**Chemsec**


## Lichtreflectiewaarde




Golden 35210  
LRV 29.7 | L\* 61.42




Mint 35327  
LRV 21.8 | L\* 53.81



Ivy 35375  
LRV 15.7 | L\* 46.61



Overdye 35496  
LRV 8 | L\* 34




Raven 35505  
LRV 8.1 | L\* 34.26




Greige 35516  
LRV 36.9 | L\* 67.23




Fog 35518  
LRV 15.6 | L\* 46.51




Rainstorm 35535  
LRV 15.9 | L\* 46.87




Espresso 35585  
LRV 10.7 | L\* 39.15



Apricot 35675  
LRV 19.4 | L\* 51.1



Truffle 35760  
LRV 12.3 | L\* 41.77



Rosewood 35870  
LRV 14.2 | L\* 44.46

## Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 18, 2025

3 of 3